
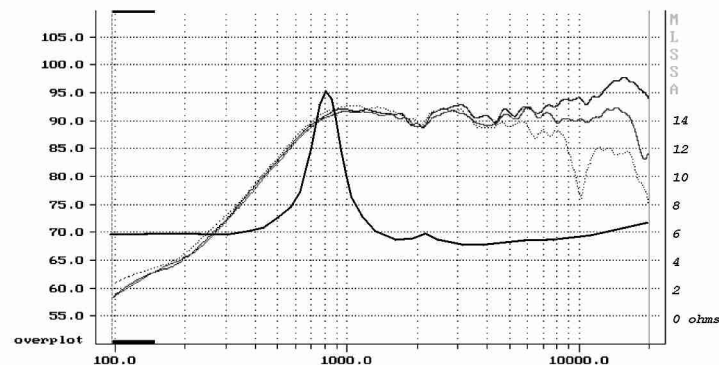


Very efficiency and high power capacity
Impregnated textile dome
Solid aluminium face plate

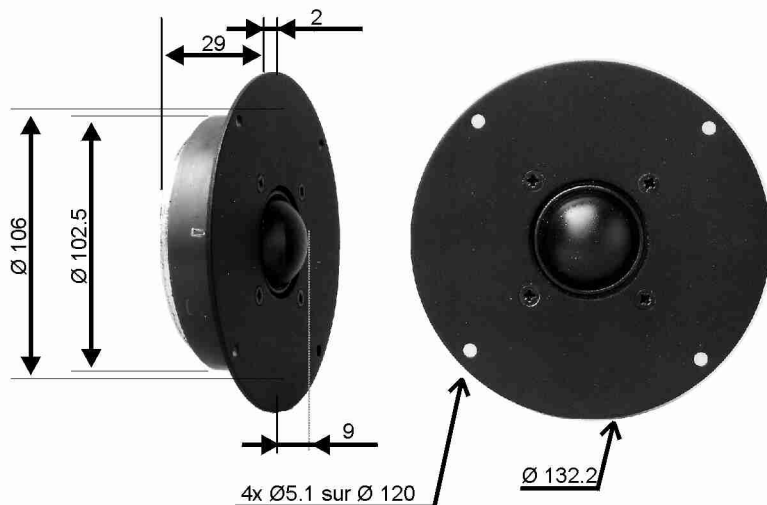

Nominal impedance... 8 ohms
Resonance... 800 Hz
Power handling (IEC) ... 70 W
Sensitivity (2.83V/1m) ... 93.0 dB

Voice coil diam. 34 mm
Voice coil length..... 2.5 mm
Former aluminium
Layer(s) 1

Resistance (DC)..... 5.3 ohms
Inductance 0.006 mH
Xmax..... ± 0.25 mm

Cone material... coated textile
Chassis aluminium
Total mass..... 1.18 kg

Replaceable voice coil assembly : RW034X0

