


The Colossus 18B-600 is intended for use as a high output bass driver in multiway systems. It features a 4 inch voice coil immersed in a symmetric magnetic field yielding increased linearity and lower distortion. This, coupled with a large Xmax of 7.2 mm ensures tight, punchy bass at high levels of excursion. The cone membrane, manufactured from Polycellulose, is much stronger and more durable than conventional paper pulp alternatives. This allows the driver to combine high sensitivity with the structural integrity required to produce undistorted low


frequencies at extreme sound pressure levels. The driver handles 600 Watts (A.E.S) continuous and can cope with peaks in excess of 2400 Watts. This is due to advanced thermal management in the form of vented diecast chassis and motor system coupled to a large vaned heatsink mounted on the rear of the unit. These measures effectively remove heat from the voice coil resulting in extremely low power compression. The Colossus 18B-600 exhibits 98 dB sensitivity and can deliver bass down to 32 Hz (-6 dB) in a 200 litre ported enclosure.

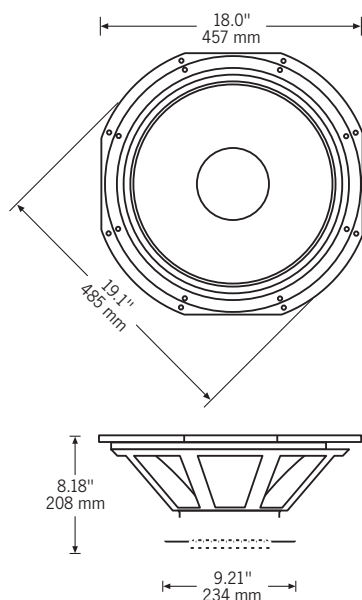


Mounting information

Overall Diameter	19.1 inch/485 mm
Width Across Flats	18.0 inch/457 mm
Flange Thickness	0.465 inch/11.8 mm
Baffle Hole Diameter, Front Mount	16.53 inch/420 mm
Baffle Hole Diameter, Rear Mount	16.33 inch/414 mm
Gasket Supplied	Front & Rear
Fixing Holes	8 x 0.275 inch diam on 18.425 PCD/8 x 0.275 inch diam on 17.25 PCD 8 x 7 mm diam on 468 PCD/8 x 7 mm diam on 438.15 PCD
Depth	8.18 inch/208 mm
Weight	29.92 lb/13.6 kg
Recommended Enclosure Volume	4.41-14.12 cu ft/125-400 litres
Volume Displaced by Driver	0.269 cu ft/7.6 litres
Shipping Weight	34.32 lb/15.6 kg
Packing Carton Dimensions	485 x 485 x 276 mm


Frequency response data

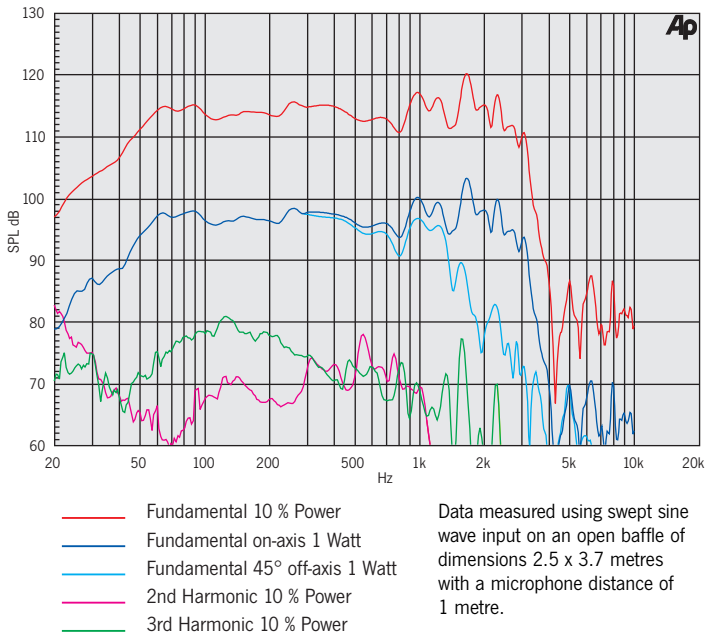

Impedance

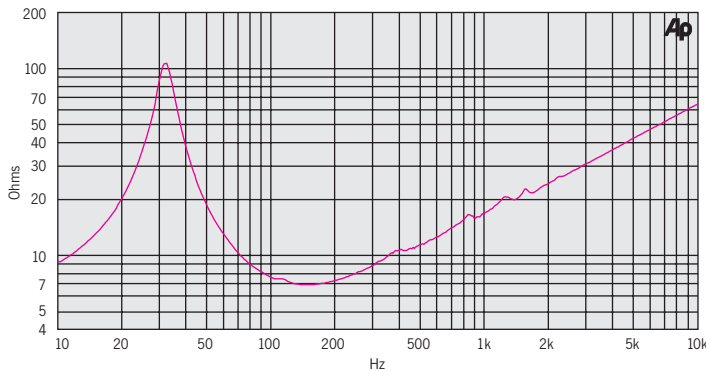

Computer predicted bass response

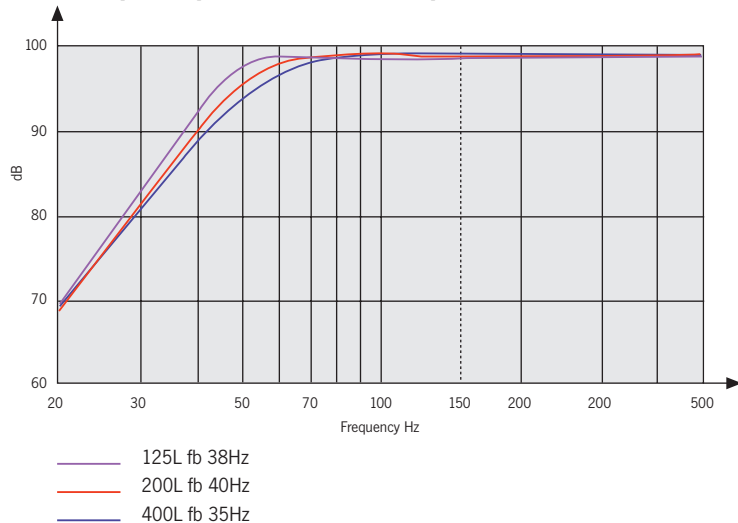

Electro mechanical specifications

Nominal Chassis Diameter	18 inch/457 mm
Impedance	8 Ω
Power Handling	600 (A.E.S.) ¹
Maximum Output Continuous/Peak	121/127 dB
Power Compression at Rated Power	4.6 dB
Usable Frequency Range (-6 dB)	30 Hz-1 kHz
Average Sensitivity (in above range) 1W/1m	98 dB
Resonance	30 Hz
Moving Mass inc. Air Load	148 grams
BL Product (Newtons/amp)	25.2
Minimum Impedance (Zmin)	7 Ω
Effective Piston Diameter	14.84 inch/377 mm
Flux Density	1.04 Tesla
Magnetic Gap Depth	0.43 inch/11 mm
Coil Winding Height	0.87 inch/22 mm
Voice Coil Length	115 feet/35 m
Magnet Weight	120 oz/3.40 kg
Maximum Cone Displacement	0.70 inch/18 mm
Peak Displacement Volume of Cone, Vd	1.61 litres
Voice Coil Diameter	4.0 inch/102 mms

Construction materials

Coil Former	Fibreglass
Voice Coil Material	Copper
Magnet	Ferrite
Chassis	Die Cast Aluminium
Cone	Curvilinear Polycellulose
Surround/Edge Termination	Polyvinyl Damped Double Half Roll Linen
Dust Dome	Solid Paper
Connectors	Push Button Spring Terminals
Polarity	Positive voltage at red terminal causes forward motion of cone

Thiele-small parameters

Resonant Frequency fs	29 Hz
D.C Resistance Re	5.8 Ω
Qts	0.236
Qes	0.245
Qms	6.75
Mms (grams)	148
Cms (microns per Newton)	203
BL Product	25.25 Tesla metres
Vas	354 litres
Reference Efficiency ηo	3.41 %
Piston Area Sd	0.112 m ²
Xmax	7.2 mm

¹ A.E.S. power handling test. Pink noise bandpass filtered at 12 dB per octave with cutoff frequencies of 30 Hz and 300 Hz. Driver mounted in free air, test signal applied at rated power for two hours.