



5380 8 Ω
5390 16 Ω

E38

PROFESSIONAL SERIES

15" Low Midrange Drivers High Efficiency High Sounding Quality

APPLICATIONS

These high efficiency - high sounding quality low-midrange drivers have been designed to perform well in the 60Hz -1500 Hz frequency domain where human hearing is so sensitive.

They can equip two-way or multi-way sound reinforcement systems of small to medium throw.

Recovery with a 1" HF comp. chamber is simple, while the recommended acoustical loading is a Reflex enclosure of 70L to 120L depending on the low roll-off required, and tuned from 47Hz to 52 Hz.

DESIGN CONCEPT

DEFLECTION CONTROLLED DIAPHRAGM optimized for dynamic damping. DEFLECTION CONTROLLED DIAPHRAGM technology consists in optimizing the shape and material of the diaphragm so that it works as a mechanical transmission line, to avoid breaking modes as well as mechanical threshold which destroy sound quality.

This leading edge technology offers substantial sonic advantages. Among them: sound coherency, fast transients, stable sound imaging, high sensitivity, wide frequency range and reduced directivity pattern.

VENTED COMPACT MAGNET SYSTEM. It has been carefully optimized to obtain maximum transducing efficiency while avoiding unlinear behavior such as coil inductance variation with position, flux modulation, harmonic distortion, rest position offset, air compression and off-axis voice-coil pushing.

Its design incorporates a T-shaped and vented pole piece, and a flux stabilization ring. It also takes into consideration demagnetization at cold temperatures.

INTERCOOLER SYSTEM (patented). Entirely integrated into the loudspeaker itself, the INTERCOOLER SYSTEM extracts the heat produced by Joule effect in the voice-coil by the means of an air flow directed through the heatsink rims of the basket by the motion of the dust-cap and the spider.

The gain brought about by this technology is over 20 % of extra power, so for example, a 3" coil according to this design has the same power handling capacity as a classical 4" one.



FEATURES

Power handling capacity **300 W AES**
Reference efficiency (1W @ 1m) **100 dB SPL**
SPL max (continuous) **121dB SPL**
Usable frequency range **60-3000 Hz**
Environmental withstanding **Outdoor**

ARCHITECTURAL SPECIFICATIONS

NOMINAL DIAMETER : 380 mm.

FRAME : High tensile alloy pressure die-cast basket with patented Intercooler system.

MAGNET SYSTEM : 3" highly energized, heat extracting design with vented pole piece and flux stabilizing ring.

VOICE COIL : High-temperature stabilized copper-clad aluminum ribbon wound on high-strength glass polyimide former.

CONE ASSEMBLY : High-strength cellulose fiber cone impregnated and front-coated with damped resins, fitted with central carbon-fiber dome and high-compliance treated double-roll fabric surround.

SPEAKER MASS : 9.10 kg.

5380 - 5390

15" Low Midrange Drivers

5380 5390

TYPICAL CHARACTERISTICS

Rated impedance	Z	8	16	Ω
Reference efficiency (1 W@1 m)	-	100	100	dB SPL
Usable frequency range ¹	-	60-3000	60-3000	Hz
Power handling capacity ² (AES)	-	300	300	W
Max Sound Pressure Level ³	SPL _{max}	121	121	dB SPL
Min. impedance modulus	Z _{min}	6.7 @ 250Hz	13.5 @ 230Hz	Ω
Voice-coil inductance ⁴ @ 1 kHz	L _{e1k}	1.24	2.46	mH
	@ 10 kHz	L _{e10k}	0.41	0.82
Bl product	Bl	20.9	28.8	N/A
Moving mass	M _{ms}	0.081	0.081	Kg

THIELE-SMALL PARAMETERS : TYPICAL (QC LIMITS)

Resonance frequency ⁵	F _s	44 (±6)	44 (±6)	Hz
DC resistance ⁶	R _e	5.8 (±0.6)	12.2 (±1.2)	Ω
Mechanical quality factor	Q _{ms}	3.7	3.7	1
Electrical quality factor	Q _{es}	0.30	0.33	1
Total quality factor	Q _{ts}	0.28	0.30	1
Mechanical suspension compliance	C _{ms}	160	160	10 ⁻⁴ m/N
Effective piston area	S _d	0.0892	0.0892	m ²
Equivalent C _{as} air load	V _{as}	0.180	0.180	m ³
Max. linear excursion	X _{max}	4.0	4.0	mm
Linear displacement volume	V _d	0.357	0.357	10 ⁻³ m ³
Half-space efficiency		5.0	4.5	%
Unity load volume	V _{as} Q _{ts} ²	13.6	16.5	10 ⁻³ m ³


ABSOLUTE MAXIMUM RATINGS

Short term max. input voltage ⁷	V _{max}	100	140	V
Max. excursion before damage	X _{dam}	14	14	mm
Ambient operating temperature		-10 to +50		°C
Storage temperature ⁸		-20 to +70		°C
Environmental conditions ⁹		Outdoor		

APPLICATION INFORMATION


Air volume occupied by the driver ¹⁰		4.3	4.3	10 ⁻³ m ³
Speaker net mass		9.1	9.1	Kg
Recommended reflex box	V _b /F _b	110 / 47		L / Hz
Electrical polarity		A positive voltage applied on the red terminal produces forward cone motion.		

PHYSICAL CHARACTERISTICS

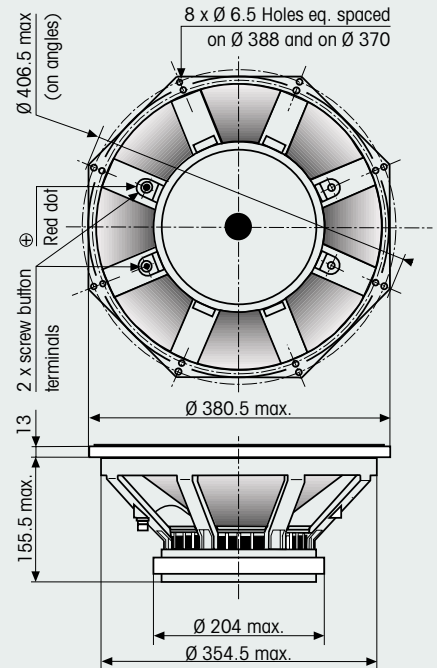

SPECIFICATION NOTES

- Note 1 : Allowing for energy response, excursion capability, Power spectrum, and -3dB low freq. roll-off for standard reflex tuning.
- Note 2 : Established at 20°C ambient temp., according to AES2-1984 standard using IEC268-1 simulated programme signal and a 75 liter Bass-Reflex test enclosure tuned at 45Hz.
- Note 3 : Established at 1m on axis of the loudspeaker mounted in test enclosure, when driven at full AES Power Handling Capacity, including 4dB of thermal compression loss.
- Note 4 : Measured at 20 mA in free air.
- Note 5 : Measured at 20 mA and 20°C ambient temp. in free air conditions, after full run and rest.
- Note 6 : Measured at 20°C ambient temp. QC limits are ±10%
- Note 7 : Stated in RMS voltage according to IEC 268-5.
- Note 8 : Includes shipping conditions. The lower limit prevents from demagnetization.
- Note 9 : Our products are classified in three categories : Indoor, Outdoor, and Outdoor+ for permanent outdoor use or severe conditions.
- Note 10 : Calculated for front mounting on to a 18 mm thick board.

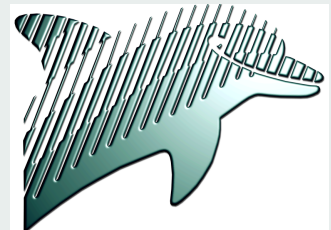

PHL
A U D I O
461, rue des chênes . Z.A
77590 CHARTRETTES
FRANCE

Tél : 33 01 64 81 29 80
Fax : 33 01 60 69 10 28

e-mail : phlaudio@phlaudio.com
<http://www.phlaudio.com>