



# F SERIES

# W4-1052SDF

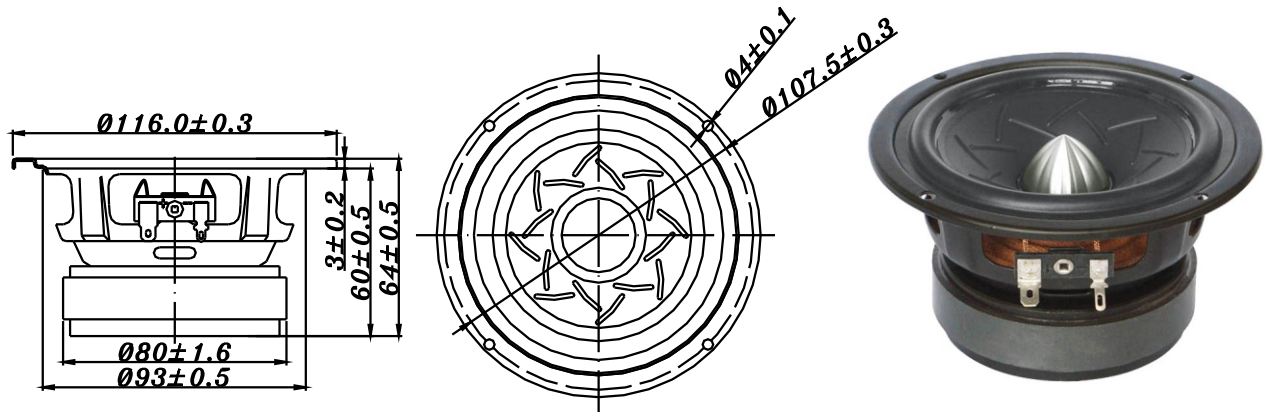

- FULL RANGE DESIGN
- STRUCTURED PP CONE WITH WIDE RANGE TEMPERATURE RUBBER SURROUND, SATBLE FO
- STAMPED STEEL BASKET
- GOOD FOR HOME THEATER, MULTIMEDIA, CAR APPLICATION

## 4" PP FULL RANGE

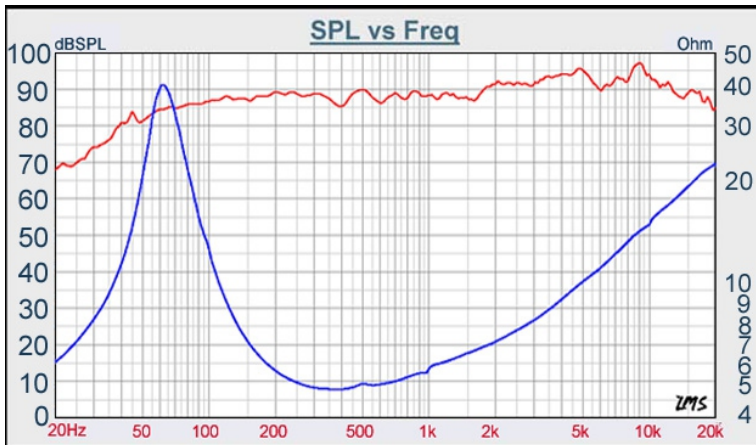

DIAPHRAGM MTL	Structured pp
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	4 Ω
DCR IMPEDANCE	3.8 Ω
SENSITIVITY 1W/1m	87 dB
FREQUENCY RESPONSE	70 - 17K Hz
FREE AIR RESONANCE	70 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	2.5 mm
RATED POWER INPUT	20 W
MAXIMUM POWER INPUT	40 W
FORCE FACTOR, BL	4.10 TM
TYPE OF MAGNET	Ferrite
MOVING MASS	4.61 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	1129 μMN <sup>-1</sup>
EFFECTIVE PISTON AREA	0.0057 M <sup>2</sup>
Levc	0.077 mH
Zo	45 Ω
X-max	2.6 mm
Vas	5.21 Litr
Qts	0.42
Qms	4.80
Qes	0.46



VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com