


Non resonant die cast chassis
High loss rubber surround
High temperature voice coil

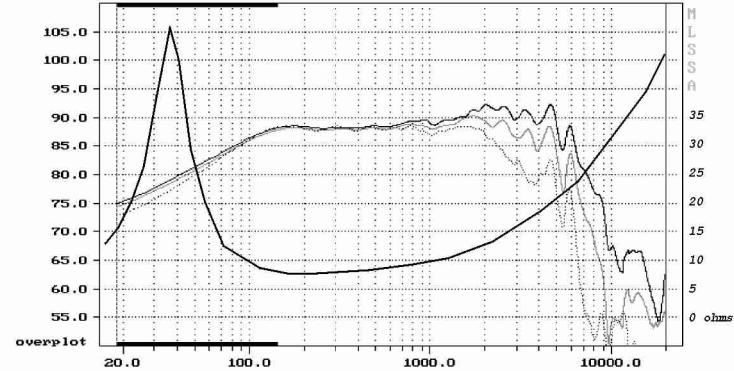

Nominal impedance 8 ohms
Resonance 43.81 Hz
Power handling (IEC) 60 W
Sensitivity (2.83V/1m) 89.2 dB

Resistance (DC) 6.49 ohms
Inductance 0.87 mH
Xmax ± 3.25 mm
Qms 2.40
Qes 0.41
Qts 0.35
Vas 26.36 l

Voice coil diam. 30 mm
Voice coil length 12.5 mm
Former kapton
Layer(s) 1
Wire type flat
Force factor 7.35 NA
Moving mass 12.39 gr

Cone material coated paper
Suspension rubber
Chassis die cast
Total mass 1.70 kg

