


Non resonant die cast chassis
High loss rubber surround
High temperature voice coil

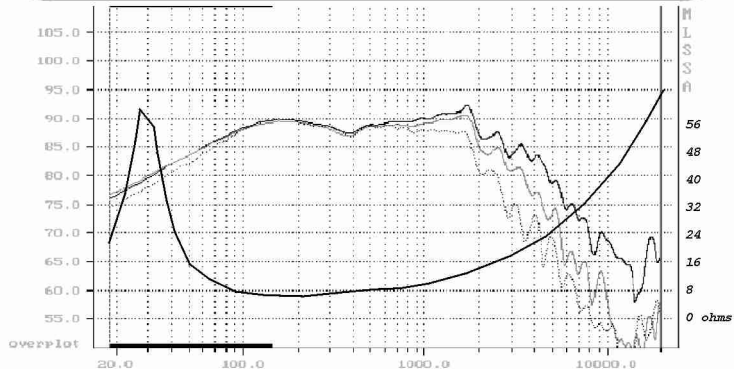

Nominal impedance 8 ohms
Resonance 31.32 Hz
Power handling (IEC) 70 W
Sensitivity (2.83V/1m) 90.6 dB

Resistance (DC) 6.39 ohms
Inductance 1.39 mH
Xmax ± 4.4 mm
Qms 3.00
Qes 0.36
Qts 0.32
Vas 88.61 l

Voice coil diam. 37 mm
Voice coil length 14.8 mm
Former kapton
Layer(s) 1
Wire type flat
Force factor 8.56 NA
Moving mass 21.08 gr

Cone material HDA
Suspension rubber
Chassis die cast
Total mass 2.3 kg

