


Non resonant die cast chassis
High loss rubber surround
High temperature voice coil

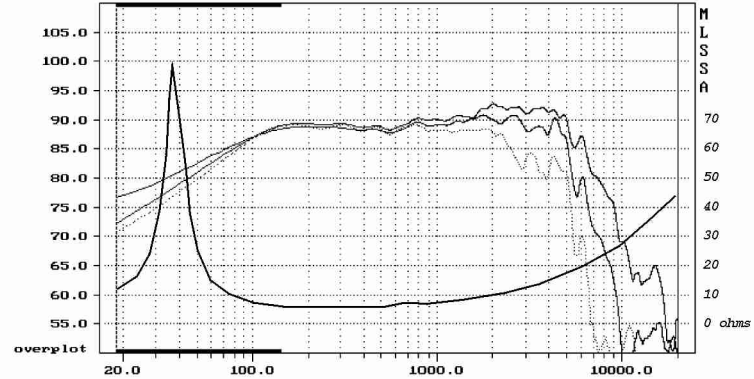

Nominal impedance... 8 ohms
Resonance 41.47 Hz
Power handling (IEC) 60 W
Sensitivity (2.83V/1m) 89.3 dB

Resistance (DC)..... 5.73 ohms
Inductance 0.78 mH
Xmax..... ± 3.25 mm
Qms..... 5.00
Qes 0.38
Qts..... 0.35
Vas..... 29.19 l

Voice coil diam..... 30 mm
Voice coil length..... 12.5 mm
Former kapton
Layer(s) 1
Wire type flat
Force factor 7.04 NA
Moving mass..... 12.48 gr

Cone material... coated paper
Suspension rubber
Chassis..... die cast
Total mass..... 2.10 kg

