
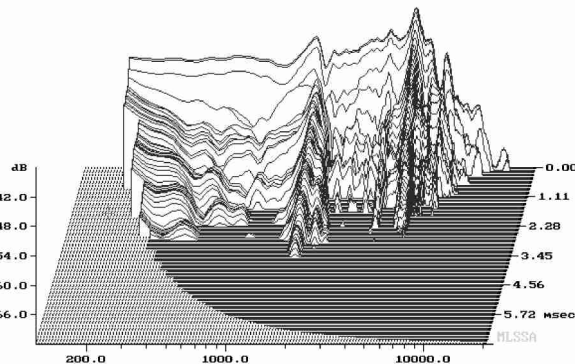
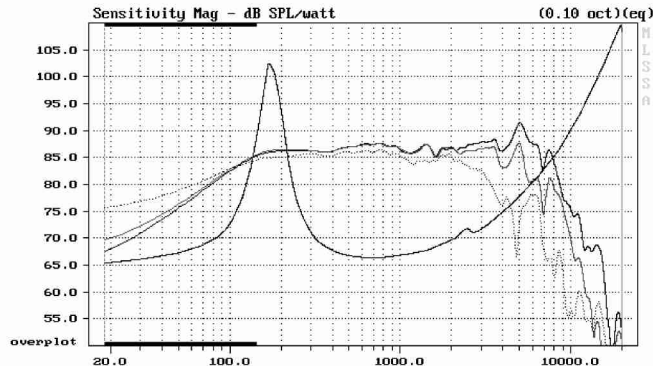


Non resonant high impact polymere chassis
Foam surround
High temperature voice coil

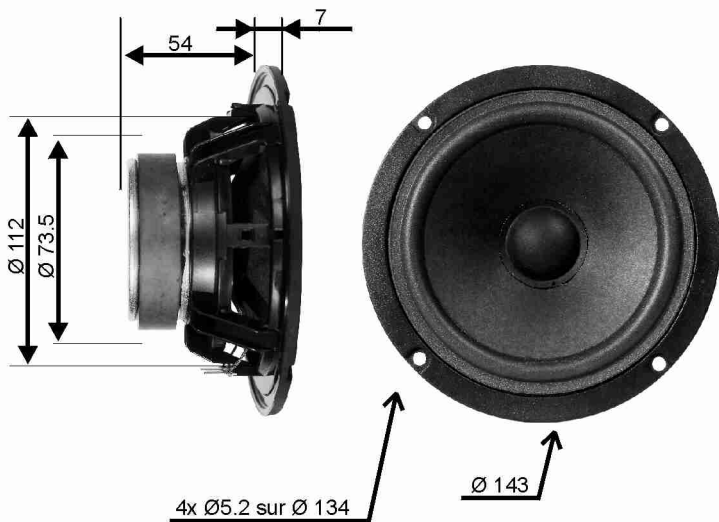

Nominal impedance... 8 ohms
Resonance 68.5 Hz
Power handling (IEC) 40 W
Sensitivity (2.83V/1m) 88.1 dB

Resistance (DC)..... 6.2 ohms
Inductance 0.41 mH
Xmax ± 4 mm
Qms 2.39
Qes 0.63
Qts 0.50
Vas 8.38 l

Voice coil diam. 25 mm
Voice coil length 12 mm
Former aluminium
Layer(s) 2
Wire type round
Force factor 5.14 NA⁻¹
Moving mass 6.28 gr

Cone material paper
Suspension..... foam
Chassis polymer
Total mass 0.70 kg