

**AUDAX**

LA PASSION DU HAUT-PARLEUR

8" - Paper cone driver - 210 mm

**HT210A0**

BASS MIDRANGE

100786V


**INDUSTRIAL SERIES**

2 or 3-way system use  
Paper cone  
Corrugated suspension  
High temperature voice coil  
Stamped steel chassis

Utilisation 2 ou 3 voies  
Cône papier  
Suspension corruguée papier  
Bobine haute température  
Châssis acier embouti

**RESPONSE CURVE**

refer to page 15

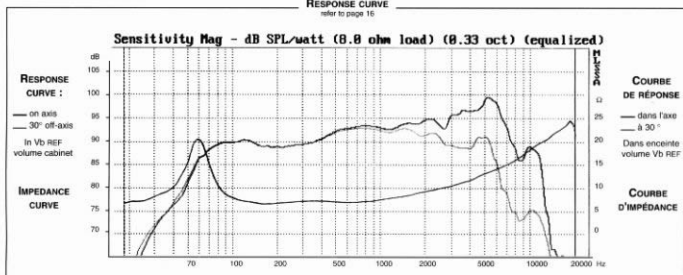
**SPECIFICATIONS**

Technical Characteristics	Symbol	Value	Units
<b>PRIMARY APPLICATIONS</b>			
Nominal Impedance	Z	8	$\Omega$
Resonance Frequency	Fs	58	Hz
Nominal Power Handling	P	45	W
Sensitivity	E	92	dB
<b>VOICE COIL</b>			
Voice coil diameter	$\varnothing$	25	mm
Voice coil length	h	10	mm
DC Resistance	Re	5,7	$\Omega$
Former	-	aluminium	-
<b>MAGNET</b>			
Magnet dimensions	$\varnothing \times h$	72 x 15	mm
Magnet weight	m	240.10 <sup>-3</sup>	kg
Force factor	BL	4	NA'
Linear excursion	Xmax	$\pm 3$	mm
<b>PARAMETERS</b>			
Total Q Factor	Qts	0,97	-
Moving Mass	Mms	9,8.10 <sup>-3</sup>	kg
Volume Eq. of Air at Cas	Vas	52.10 <sup>-3</sup>	m <sup>3</sup>
Mass of speaker	M	740.10 <sup>-3</sup>	kg

HT210A0 W08PPP2512

The corrugated paper surround on this 8" bass midrange is coated with proprietary, visco-elastic damping compound making its performance ideal for 2 or 3-way systems. The high temperature 1" voice coil is wound onto an aluminium former to ensure good power handling capacity.

Ce haut-parleur de 210 mm, équipé d'un cône papier et d'une suspension corruguée papier amortie par un traitement visco-élastique est destiné à une enceinte 2 ou 3 voies de qualité. Sa bobine haute température sur support aluminium lui confère une bonne tenue en puissance.

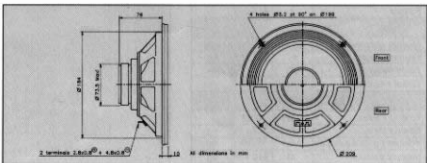

Please refer to method of measurement and measurement conditions page 15 to 19.

Audax may, without prior notification modify the specifications on its products further to research and development requirements.

100875B