

12" - PAPER CONE DRIVER - 300 mm

2 x 4 Ω

CAR LINE


Hi Fi automotive application
 Double bobbin
 Zamak die cast chassis
 Exponential paper cone
 Coated textile suspension
 Kapton voice coil former (48 mm Ø)
 Flat copper wire
 Gold plated binding post


Application automobile
 Double bobine
 Châssis Zamak moulé
 Cône papier profil exponentiel
 Suspension toile traitée
 Bobine sur support Kapton (Ø 48 mm)
 Fil cuivre plat sur chant
 Bornes plaquées or



This 12" driver has been designed for high fidelity automotive central channel subwoofer applications. The double bobbin (2 x 4 Ω) sums the left and right channel while offering very high efficiency (99 dB) and high power handling capacity resulting from the edgewound flat copper wire mounted onto a fiberglass reinforced Kapton former. The gold plated binding posts fitted onto the Zamak die cast chassis offer the possibility of using large diameter cables. The "suggested applications" charts indicate various driver loads. The response curves shown on the diagram indicate the predicted low end response of the driver in the suggested box volume (Vb) with suggested port (Dp-Lp).

Ce haut-parleur de 300 mm est destiné à une utilisation haute fidélité automobile comme subwoofer central. Sa double bobine (2 x 4 Ω) réalise la somme des canaux droite-gauche tout en offrant un rendement très élevé (99 dB) et une bonne tenue en puissance résultant d'une bobine sur support Kapton renforcé fibre de verre à fil de cuivre plat sur chant. Le châssis Zamak moulé est équipé de borniers plaqués or permettant l'utilisation de câbles de forte section. Le tableau "Suggested applications" indique différents types de charge. Les courbes publiées correspondent à la réponse dans le grave pour un volume (Vb) et une dimension d'évent donnée (Dp-Lp).

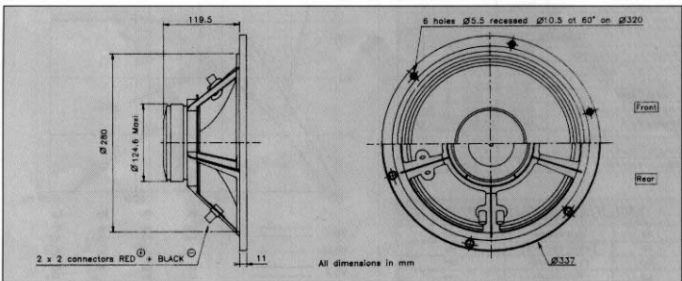

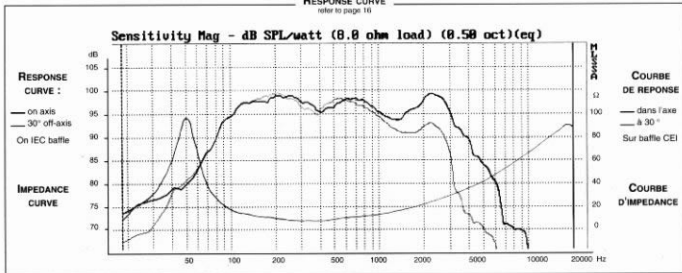RESPONSE CURVE
 refer to page 16


SPECIFICATIONS

Technical Characteristics	Symbol	Value	Units
---------------------------	--------	-------	-------

PRIMARY APPLICATION

Nominal Impedance	Z	8	Ω
Resonance Frequency	Fs	50	Hz
Nominal Power Handling	P	350	W
Sensitivity	E	98	dB

VOICE COIL

Voice coil diameter	∅	100	mm
Minimum Impedance	Zmin	8	Ω
DC Resistance	Re	5.8	Ω
Voice Coil Inductance	Lbm	0.74	mH
Voice coil Length	h	18	mm
Former	-	Kapton	-
Number of layers	n	1	-

MAGNET

Magnet dimensions	∅ x h	224 x 23	mm
Magnet weight	m	3.43	kg
Flux density	B	1.3	T
Force factor	BL	23.8	NA
Height of magnetic gap	He	7	mm
Stray flux	Fmag	-	Am ⁻¹
Linear excursion	Xmax	±5.5	mm


PARAMETERS

Suspension Compliance	Cms	0,11 · 10 ⁻²	mN ⁻¹
Mechanical Q Factor	Qms	1,54	-
Electrical Q Factor	Qes	0,29	-
Total Q Factor	Qts	0,24	-
Mechanical Resistance	Rms	18,2	kg s ⁻¹
Moving Mass	Mms	85 · 10 ⁻³	kg
Effective Piston Area	S	5,38 · 10 ⁻²	m ²
Volume Equivalent of Air at Cas	Vas	43,9 · 10 ⁻³	m ³
Mass of speaker	M	10	kg


APPLICATION PARAMETERS

Vb	Box volume	dm ³
Fb	Tuning frequency	Hz
Dp	Port diameter	cm
Lp	Port length	cm

IMPULSE RESPONSE



WATERFALL

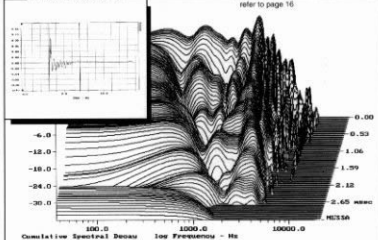 refer to page 16


SUGGESTED APPLICATIONS

 refer to page 8 to 13
