


Ultra stiff die cast chassis
Rubber impregnated textile suspension
High power handling capacity

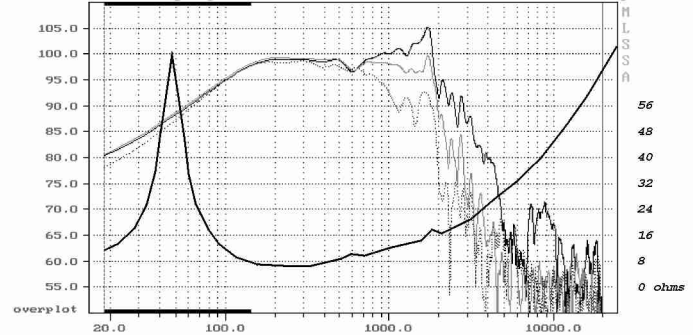

Nominal impedance... 8 ohms
Resonance... 49 Hz
Power handling (IEC) ... 350 W
Sensitivity (2.83V/1m) ... 100.0 dB

Resistance (DC)... 5.6 ohms
Inductance ... 1.29 mH
Xmax... ± 5.5 mm
Qms... 4.06
Qes... 0.34
Qts... 0.32
Vas... 107 l

Voice coil diam... 100 mm
Voice coil length ... 18 mm
Former... kapton
Layer(s) ... 1
Wire type ... flat
Force factor ... 23.39 NA
Moving mass... 107.0 gr

Cone material ... paper
Suspension ... coated textile
Chassis... zamack
Total mass... 10.0 kg

