
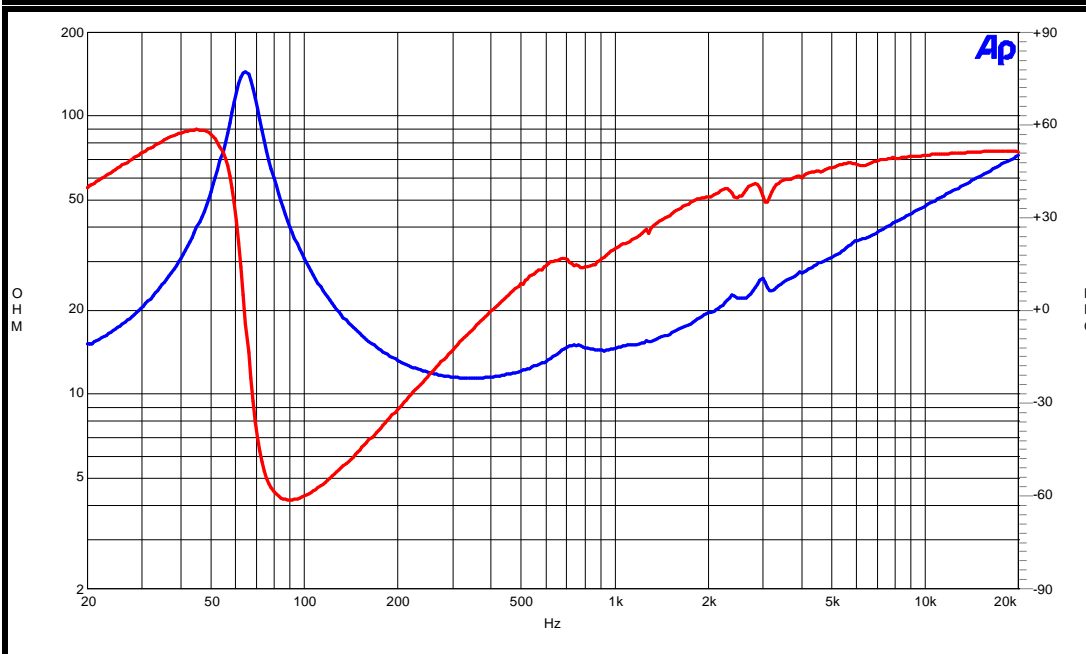


Model : **10HPL64-16**

17/10/2002

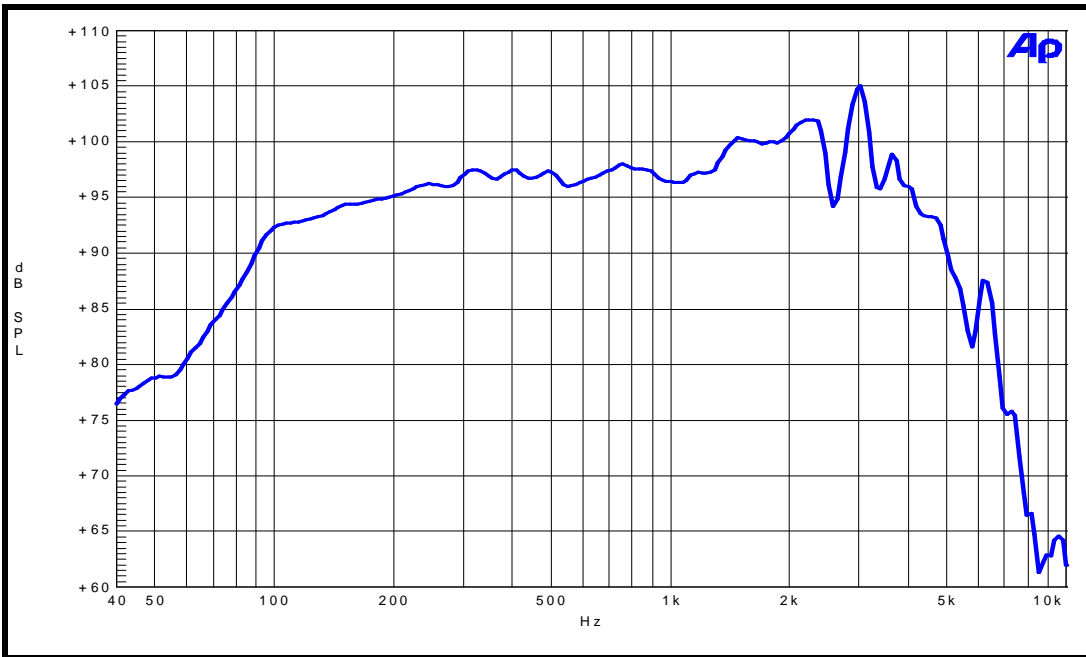

|                    |                  |                 |
|--------------------|------------------|-----------------|
| Fs:                | <b>64</b>        | Hz              |
| Re:                | <b>10,37</b>     | Ohms            |
| Zmax:              | <b>145.56</b>    | Ohms            |
| Qms:               | <b>5.05</b>      |                 |
| Qes:               | <b>0,39</b>      |                 |
| Qts:               | <b>0,36</b>      |                 |
| Vas:               | <b>30,40</b>     | Liters          |
| Sd:                | <b>320</b>       | cm <sup>2</sup> |
| Mms:               | <b>29,2</b>      | Grams           |
| Le:                | <b>0,63</b>      | mH              |
| Cms:               | <b>211,00</b>    | μ m/Newton      |
| Bl:                | <b>17,70</b>     | Tesla/m         |
| SPLref:            | <b>97,00</b>     | dB              |
| Eta0:              | <b>1,99</b>      | %               |
| Xmax:              | <b>4,00</b>      | mm              |
| (*)Power Handling: | <b>200</b>       | W R.M.S.        |
| v.coil diameter:   | <b>64,00</b>     | mm              |
| winding depth:     | <b>13,00</b>     | mm              |
| winding material:  | <b>aluminium</b> |                 |

(\*) A.E.S. Standard

