





15BG100-4

Rev: 0

Frequency Response

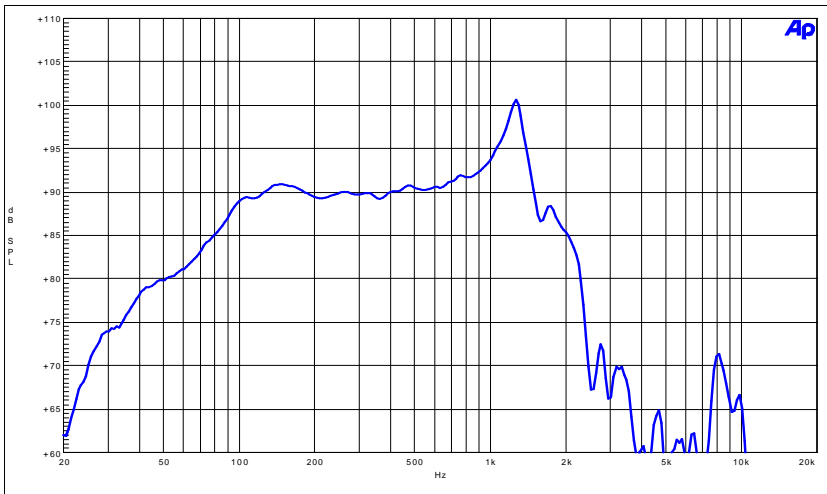

Impedance

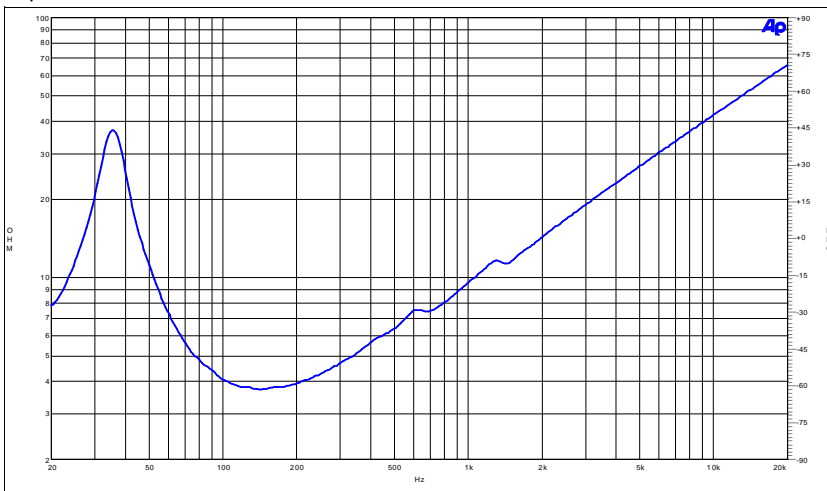

Specifications

Nominal Diameter	15"
Nominal Impedance	4 Ω
Minimum Impedance	3,8 Ω
Power Handling	
Nominal ¹	1.000 W
Continuous Program ²	2.000 W
Sensitivity (1W/1m) ³	93 dB
Frequency Range	Fs to 100 Hz
Voice Coil Diameter	100,00 mm
Winding Material	Copper
Former Material	Fiber Glass
Winding Depth	26,50 mm
Magnetic Gap Depth	11 mm
Flux Density	1,25 T
Surround Material	Rubber
Surround Shape	Roll
Spider Material	PolyCotton
Magnet Material	Neodimium
Cone Material	Paper
Water Proof Front Side (WP)	<input type="checkbox"/>
Water Proof Both Sides (TWP)	<input checked="" type="checkbox"/>
Epoxy Treatment	<input type="checkbox"/>
Demodulation Ring	<input checked="" type="checkbox"/>
Shorting Copper Ring	<input type="checkbox"/>
Double Spider	<input checked="" type="checkbox"/>
Vented Gap	<input checked="" type="checkbox"/>

17/06/2010

Thiele & Small Parameters⁴

Fs	35 Hz
Re	3,1 Ω
Qes	0,42
Qms	4,98
Qts	0,38
Vas	96,6 dm ³
Sd	855 cm ²
η ₀	0,99 %
Xmax	10,5 mm
Xvar	14,00 mm
Mms	214,8 g
Bl	18,97 Txm
Le	1,10 mH
Cms	94,1 μm/N

Mounting Information

Overall Diameter	393 mm (15.5 in)
Bolt Circle Diameter	374 mm (16.7 in)
Baffle Cutout Diameter	353 mm (13.9 in)
Depth	180 mm (7.0 in)
Flange / Gasket Thickness	15 mm (5/8 in)
Net Weight	9.0 Kg (20.5 lb)

(1) A.E.S. Standard

(2) Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

(3) Applied RMS Voltage is set to 2V for 4 ohms Nominal Impedance. Average SPL from 100 to 1000 Hz

(4) Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.