





6PS44-16

Rev: 0

Frequency Response

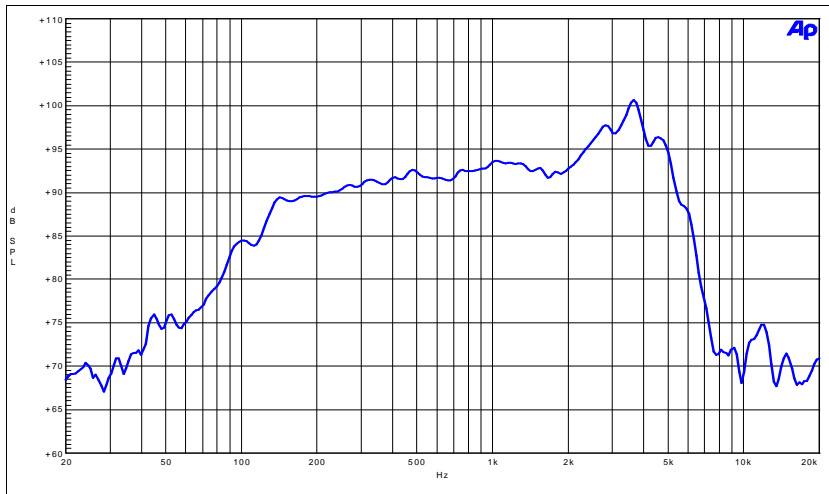

Impedance

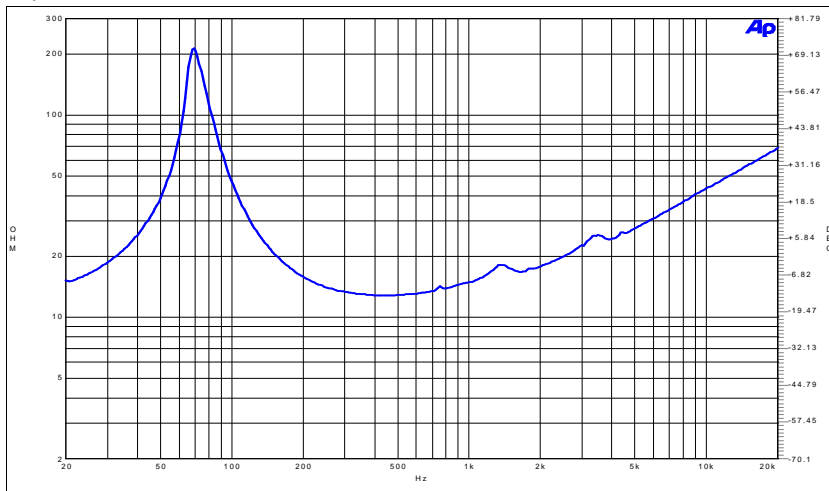

Specifications

Nominal Diameter	6"
Nominal Impedance	16 Ω
Minimum Impedance	12,9 Ω
Power Handling	
Nominal ¹	200 W
Continuous Program ²	400 W
Sensitivity (1W/1m) ³	92 dB
Frequency Range	Fs to 5000 Hz
Voice Coil Diameter	44,00 mm
Winding Material	Copper
Former Material	Kapton
Winding Depth	12,00 mm
Magnetic Gap Depth	6 mm
Flux Density	1.250 T
Surround Material	Rubber
Surround Shape	Roll
Spider Material	Cotton
Magnet Material	Ceramic
Cone Material	Paper
Water Proof Front Side (WP)	<input checked="" type="checkbox"/>
Water Proof Both Sides (TWP)	<input type="checkbox"/>
Epoxy Treatment	<input type="checkbox"/>
Demodulation Ring	<input checked="" type="checkbox"/>
Shorting Copper Ring	<input type="checkbox"/>
Double Spider	<input type="checkbox"/>
Vented Gap	<input type="checkbox"/>

13/10/2011

Thiele & Small Parameters⁴

Fs	73 Hz
Re	11,5 Ω
Qes	0,42
Qms	11,50
Qts	0,41
Vas	6,5 dm ³
Sd	132 cm ²
η_0	0,63 %
Xmax	4,5 mm
Xvar	6,00 mm
Mms	17,0 g
Bl	14,80 Txm
Le	1,00 mH
Cms	265,0 μ m/N

Mounting Information

Overall Diameter	187mm (7,4in)
Bolt Circle Diameter	172mm (6,7in)
Baffle Cutout Diameter	145mm (5,7in)
Depth	90 mm (3,55 in)
Flange / Gasket Thickness	11mm (0,4in)
Net Weight	2,5 Kg (5,68 lb)

(1) A.E.S. Standard

(2) Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

(3) Applied RMS Voltage is set to 4V for 16 ohms Nominal Impedance. Average SPL from 200 to 2000 Hz

(4) Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.