



DE120-16

Rev: 0

Specifications ¹


Throat Diameter	1"
Nominal Impedance	16 Ω
Minimum Impedance	10.8 Ω
Power Handling (2 - 20 kHz)	
Nominal ²	20 W
Continuous Program ³	40 W
Sensitivity (1W/1m) ⁴	107 dB
Frequency Range	1.2-18 kHz
Recommended Crossover ⁵	2 kHz
Voice Coil Diameter	36 mm
Winding Material	Aluminium
Inductance	0.14 mH
Diaphragm Material	Mylar
Flux Density	1.9 T

- (1) Driver mounted on B&C ME 45 horn
- (2) 2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range. Power calculated on rated minimum impedance.
- (3) Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- (4) Applied RMS Voltage is set to 4V for 16 ohms Nominal Impedance. Average SPL from 1200 to 18000 Hz
- (5) 12 dB/oct. or higher slope high-pass filter.


Mounting Information

Three M6 holes 120° on 57 mm (2.2 in) diameter	
Due fori M5 180° su diametro 57mm (2.2")	
Overall Diameter	71 mm
Depth	32 mm
Net Weight	0.5 kg

Frequency Response

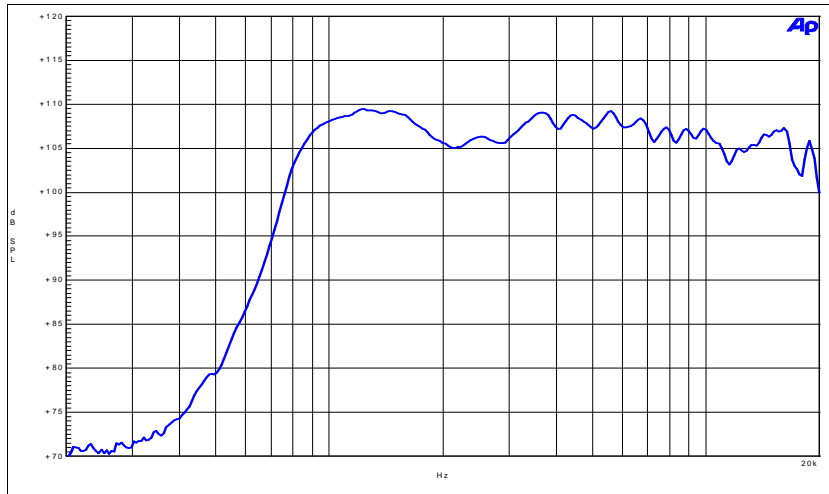

Impedance

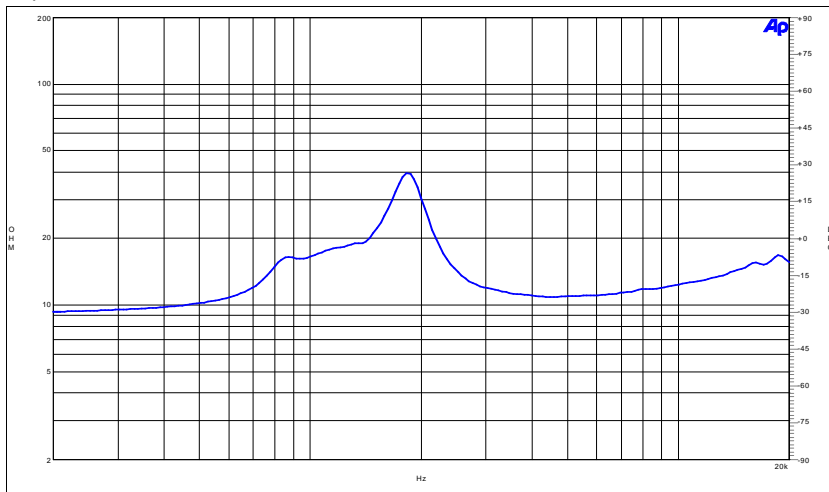

12/05/2010