



DE180-16

Rev: 0

Specifications ¹

Throat Diameter	1"
Nominal Impedance	16 Ω
Minimum Impedance	10,5 Ω
Power Handling	
(2 - 20 kHz)	
Nominal ²	60 W
Continuous Program ³	120 W
Sensitivity (1W/1m) ⁴	107,5 dB
Frequency Range	1,2 - 17 kHz
Recommended Crossover ⁵	2 kHz
Voice Coil Diameter	44 mm
Winding Material	Aluminium
Inductance	0,14 mH
Diaphragm Material	Polyimide
Flux Density	1,35 T


- (1) Driver mounted on B&C ME 45 horn
- (2) 2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range. Power calculated on rated minimum impedance.
- (3) Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- (4) Applied RMS Voltage is set to 4V for 16 ohms Nominal Impedance. Average SPL from 1200 to 17000 Hz
- (5) 12 dB/oct. or higher slope high-pass filter.

Mounting Information


Two M6 holes 180° on 76 mm (3 in) diameter

Overall Diameter	102 mm
Depth	61 mm
Net Weight	1,6 kg

Frequency Response

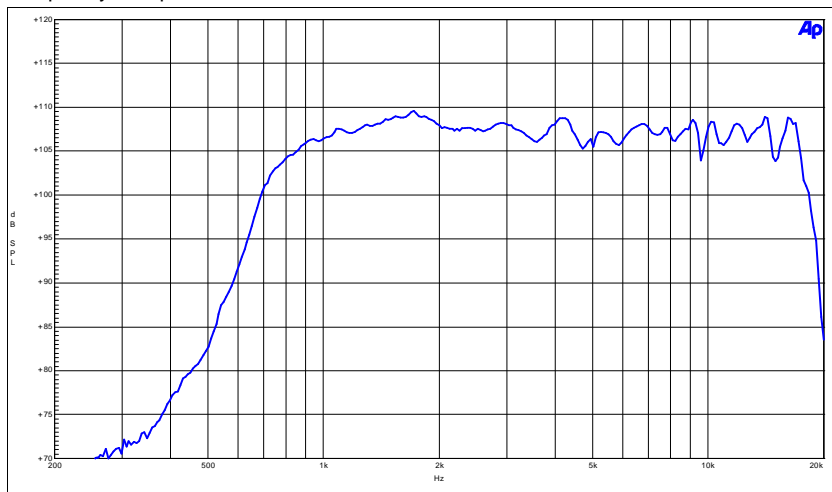

Impedance

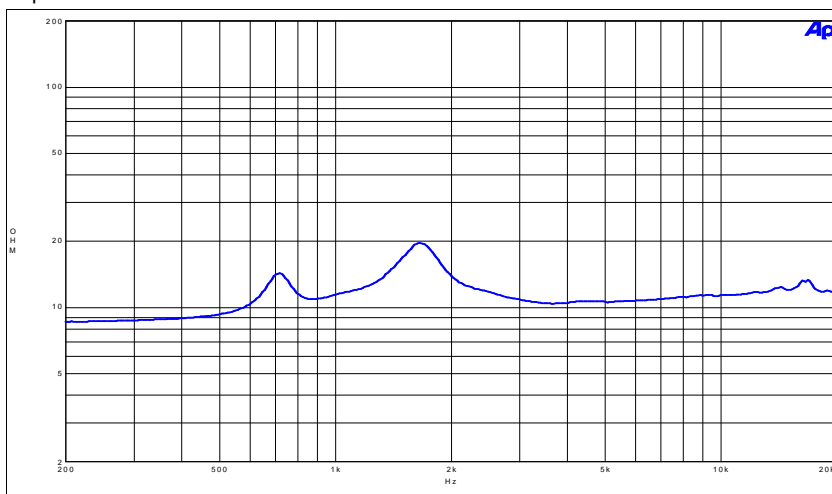

08/11/2007