



D 32

HF transducer

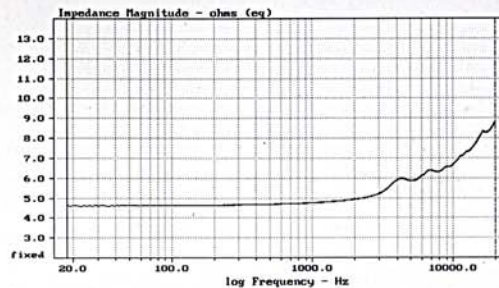

Very high frequency transducer, extremely high sensitivity over a range from 5 kHz. to 18 kHz.

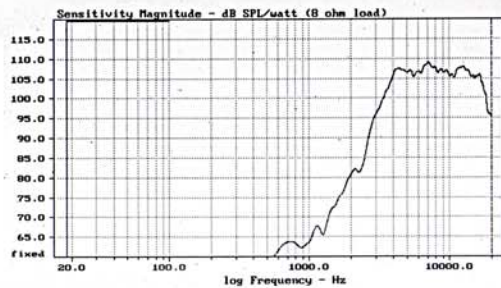

Specifications

Nominal impedance	8 ohms
D.C resistance	4.6 ohms
Power capacity ¹	18 w. cont. program
Sensitivity (1W/1m) ²	107 dB.
Dispersion pattern	40°
Frequency range	5 - 19 kHz.
Recommended crossover	5.5 kHz. 12 dB/oct.
Voice coil diameter	32 mm.
winding material	aluminium
inductance	0.08 mH.
Diaphragm material	mylar
Flux density	1.2 T

Mounting Informations

Overall diameter	112 mm.
Bolt circle diameter	102 mm.
Baffle cutout diameter	75 mm.
Depth	62 mm.
Net weight	1.1 Kg.

¹ AES standard

² Pink noise 5 to 20 kHz.

B&C SPEAKERS

HF transducer
D 32