




W6N8-120 Professional Series

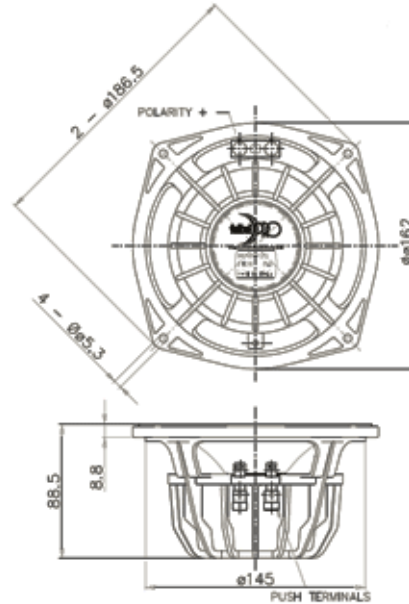

NOMINAL SPECIFICATIONS

Nominal Diameter	160 mm (6 in)
Overall Diameter	186.5/162 mm (7.34/6.37 in)
Bolt Circle Diameter	172 mm (6.77 in)
Baffle Cutout Diameter	147 mm (5.78 in)
Depth	87.2 mm (3.43 in)
Flange and Gasket Thickness	7.5 mm (0.29 in)
Net Weight	1.3 Kg (2.86 lb)
Shipping Box (Single Carton Box)	195x195x141 mm (7.68x7.68x5.55 in)
Shipping Weight	1.5 Kg (3.3 lb)

ELECTRICAL SPECIFICATION

Nominal Impedance	8 Ohm
Minimum Impedance	6.6 Ohm
Nominal Power Handling *	120 W
Maximum Power Handling **	240 W
Sensitivity (1W/1m)	95 dB
Frequency Range	100÷10000 Hz
Voice Coil Diameter	37 mm (1.5 in)
Winding Material	Al
Former Material	Kapton
Winding Depth	12 mm (0.47 in)
Magnetic Gap Depth	6 mm (0.24 in)
Flux Density	1.4 T

THIELE & SMALL PARAMETERS

Fs	100 Hz
Re	5.8 Ohm
Qes	0.36
Qms	6.36
Qts	0.34
Vas	5.04 dm ³ (0.18 ft ³)
Sd	114 cm ² (17.67 in ²)
Xmax ***	5 mm
Xdamage ****	11.6 mm
Mms	11.7 g
Bl	10.3 N/A
Le	0.35 mH
Mmd	11 g
Cms	0.27 mm/N
Rms	1.03 Kg/s
Eta Zero	0.93 %
EBP	277 Hz

NOTES

(*) 2 Hours Test According to AES 2-1984 Rev. 2003

(**) Maximum power is defined as 3dB greater than nominal power.

(***) Xmax = [(winding depth - magnetic gap depth) / 2] + (magnetic gap depth / 3)

(****) Maximum excursion before permanent damage

CURVES

