FR88 full range driver

FEATURES
- Die cast chassis
- Aluminum cone
- Extend frequency response
- 25 mm voice coil
- Low distortion

Specifications		Magnet System	
Overall Dimensions	88.4X52.4mm	Magnet system type	ferrite,shield
Net. Weight	0.58Kg	Magnetic Gap Height	3mm
Nominal Power Handlng	15 W	B Flux Density	1.03T
Nominal Impedance	8 Ohms	Bl Product	3.152Tm
Sensitivity 1W/1M	85dB	Max Linear Excursion	1mm +/-
Frequency Response	105-25,000Hz	**T/S Parameter**	
resonant frequency	105Hz	Cms	1.127mm/N
Voice Coil		Sd	27.34cm^2
Voice Coil Diameter	25mm	Vas	1.2L
Voice Coil Height	5.2mm	Mmd	1.926gm
Voice Coil Former	aluminum	Mms	2gm
Voice Coil Wire	CCAR	BL	3.114Tm
Number of Layers	1	Qms	2.568
DC Resistance	6.3 Ohms	Qes	0.777
Levc @1KHz	45uh	Qts	0.597

www.fountek.net
email: info@fountek.net
tel: +86-573-8301 9220 fax: +86-573-8301 9221

SPL vs Freq

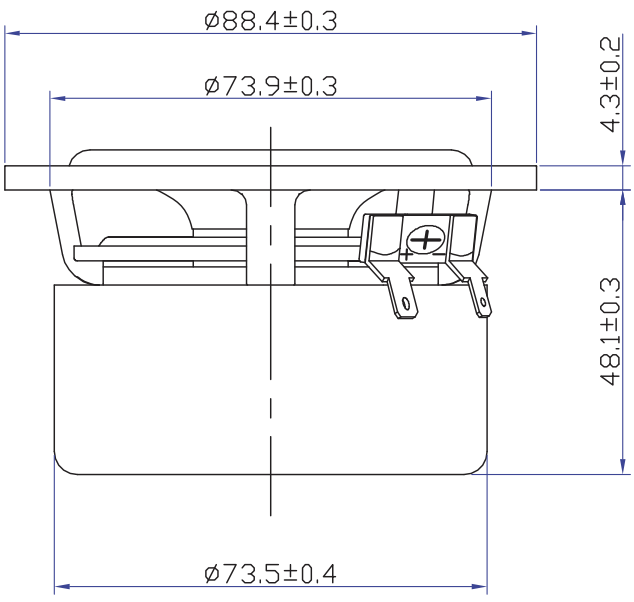

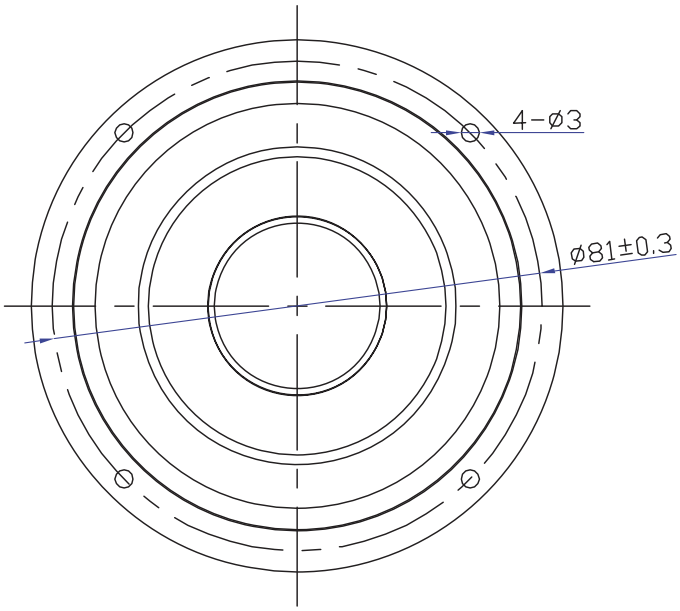

www.fountek.net
email: info@fountek.net
tel: +86-573-8301 9220 fax: +86-573-8301 9221