


The reproduction of music by PTFE-insulated SolidCore Copper wires **CUW** excels by natural vibrancy and fineness as well as highest tonal neutrality, and an excellent price/performance ratio.

Initial listening test with regular stranded wires quickly showed that our coil wires, used as internal cabling for loudspeakers impress by their detailed and acoustically balanced music performance.

An additional PTFE sheath prevents the oxygen-free copper conductor (99.997% purity) from abrasion and tonal influences by unwanted microphonics.

The following, individually isolated and twisted versions are particularly appropriate:

- 2 * 1.0mm for tweeters
- 2 * 1,5mm for mid-drivers and mid-woofers
- 6 * 1,5mm for complete audio signals
- 2 * 2,0mm for woofers and sub-woofers

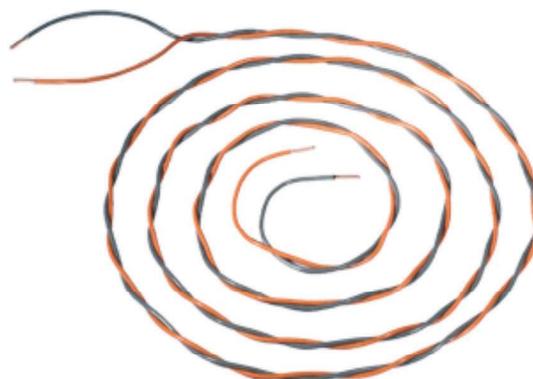

* Insulation test voltage 2 500V DC,
Max. operating voltage 250V AC
Strength of PTFE insulation: min. 0.25 mm

CUW210GY/OG	
Copper wire 2 * 0,8 mm ² , PTFE-insulated, grey/orange *	
price á meter	19,90 €

CUW215GY/OG	
Copper wire 2 * 1,8 mm ² , PTFE-insulated, grey/orange *	
price á meter	24,90 €

CUW615GY/OG	
Copper wire 6 * 1,8 mm ² , PTFE-insulated, grey/orange *	
price á meter	79,80 €

CUW220GY/OG	
Copper wire 2 * 3,1 mm ² , PTFE-insulated, grey/orange *	
price á meter	29,90 €

The mixture of **silver plus 1% gold** has proven itself excellently as capacitor film for the MCap® SUPREME SilverGold series. The resulting sound is so impressive that it was only natural to think of using this alloy for the internal wiring of electronic devices.

Listening tests with individually isolated conductors quickly proved that SilverGold shows its superior strengths every bit as convincingly in this application as well. Purity and elegance are the terms that automatically lend themselves to this exquisite material.

We offer the SilverGold wire in various diameters and insulated in PTFE. The following, individually isolated and twisted versions are particularly appropriate:

- 2 * 0,5mm for tweeters
- 6 * 0,5mm for tweeters
- 6 * 0,5mm (shielded) for LF-Signals
- 2 * 1,0mm for mid-drivers
- 2 * 1,5mm for mid-woofers and woofers
- 4 * 1,5mm for woofers and sub-woofers
- 4 * 1,5mm for complete audio signals
- 6 * 1,5mm for complete audio signals
- 8 * 1,5mm for complete audio signals

SGW105
SilverGold-wire 0,5 mm, non-insulated
price/meter [€]

SGW105WH
SilverGold-wire 0,5 mm, PTFE-insulated, white *
price/meter [€] on request

SGW105YE
SilverGold-wire 0,5 mm, PTFE-insulated, yellow *
price/meter [€]

SGW205WH/YE
SilverGold-wire 2 * 0,5 mm, PTFE-insulated, white/yellow *
price/meter [€]

NEW SGW605WH/YE
SilverGold-wire 6 * 0,5 mm, PTFE-insulated, white/yellow *
price/meter [€]

SGW605SHLD
SilverGold-wire 6 * 0,5 mm, PTFE-insulated, shielded *
price/meter [€]



Purity of silver: min. 99.97% typ. 99.99%
Purity of gold: min. 99.97% typ. 99.99%

* Insulation test voltage 2 500V DC,
Max. operating voltage 250V AC
Strength of PTFE insulation: min. 0.25 mm

SGW110
SilverGold-wire 1,0 mm, non-insulated
price/meter [€]

SGW110WH
SilverGold-wire 1,0 mm, PTFE-insulated, white *
price/meter [€] on request

SGW110YE
SilverGold-wire 1,0 mm, PTFE-insulated, yellow *
price/meter [€]

SGW210WH/YE
SilverGold-wire 2 * 1,0 mm, PTFE-insulated, white/yellow *
price/meter [€]

SGW115
SilverGold-wire 1,5 mm, non-insulated
price/meter [€]

SGW115WH
SilverGold-wire 1,5 mm, PTFE-insulated, white *
price/meter [€]

SGW115YE
SilverGold-wire 1,5 mm, PTFE-insulated, yellow *
price/meter [€]

SGW215WH/YE
SilverGold-wire 2 * 1,5 mm, PTFE-insulated, white/yellow *
price/meter [€]

SGW415WH/YE
SilverGold-wire 4 * 1,5 mm, PTFE-insulated, white/yellow *
price/meter [€]

SGW615WH/YE
SilverGold-wire 6 * 1,5 mm, PTFE-insulated, white/yellow *
price/meter [€]

SGW815WH/YE
SilverGold-wire 8 * 1,5 mm, PTFE-insulated, white/yellow *
price/meter [€]