

GBS-115N25AL01-04 Model No: Product Line: Tymphany

Driver Specification Sheet

Rev: 1 Last Update: 2016-04-28 06:40:48


Product Description

This 4.5 inch 4 ohm transducer member of the GBS family provides a very slim woofer capable of large excursion. An anodized AI cone helps to extends the piston bands in the working range. A highly optimized NdFeB and unique suspension layout combine to give a cost effective solution in a previously unavailable package.



Impedance (Ohms) @ 2.83V


Mechanical Drawing





Specifications

DO Destatores	Davia	Ohmo	0.45	5.00/	Example Devide Devident	EBP	(1/000)*60	
DC Resistance	Revc	Ohms	3.45	5.0%	Energy Bandwidth Product		(1/Qes)*fs	
Minimum Impedance	Zmin	Ohms	3.4	7.5%	Moving Mass	Mms	g	9.2
Voice Coil Inductance	Le	mH	0.17		Suspension Compliance	Cms	um/N	423.7
Resonant Frequency	Fs	Hz	80.82	15%	Effective Cone diameter	D	cm	8.6
Mechanical Q Factor	Qms		3.1		Effective Piston Area	Sd	cm^2	58.1
Electrical Q Factor	Qes	0.69			Effective Volume	Vas	L	1.79
Total Q Factor	Qts		0.57		Motor Force Factor	BL	Tm	4.81
Ratio Fs/Qts	F	Fs/Qts	142.78		Motor Efficiency Factor	ß	(T*M^2)/Ohms	6.7
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	85.45	+/- 1.0db	Voice coil former Material	VCfm		AL
Half Space Sensitivity @1W/1M	db@1W/1M	dB	81.7	+/- 1.0db	Voice coil inner diameter	VCd	mm	25.73
Gap Height	Gh	mm	5		Rated Noise Power	P	W	20
Maximum Linear Excursion	Xmax	mm	3.2		Test Spectrum Bandwidth	20Hz-3KHz		
Ferrofluid Type	FF				Driver Size	Inch	4 in	
Driver Mass	Kg	0.2						

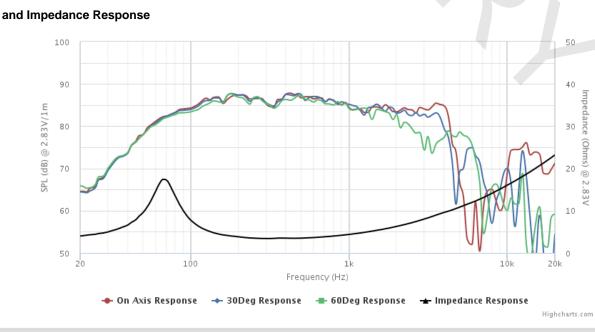

Frequency and Impedance Response