






LT3WG HF wave guide

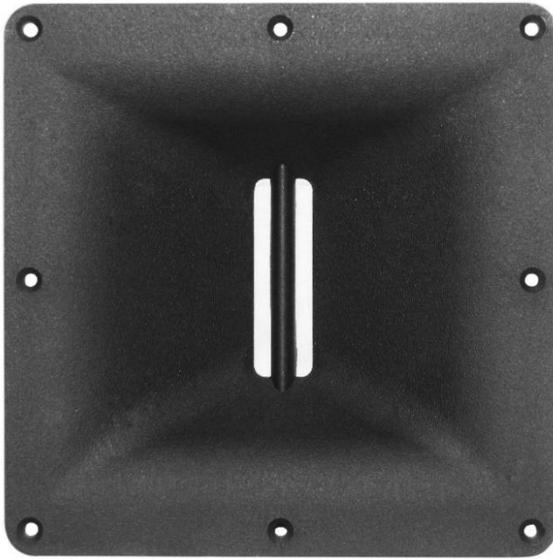

- Proprietary constant directivity design
- minimized boundary diffraction effects
- structurally reinforced, high strength polymer with excellent dimensional stability
- rotatable at 90 degrees

SPECIFICATIONS

Overall size	170x170x45 mm (6.7x6.7x1.77 in)
Material	composite polymer
Horizontal coverage	90 °
Vertical coverage	60 °
Flange thickness	4.0 mm (0.16 in)
Net weight	156 g (0.34 lbs.)

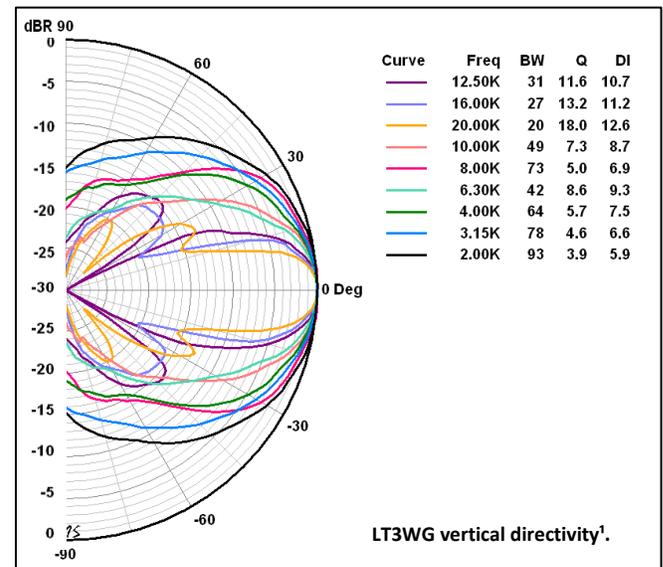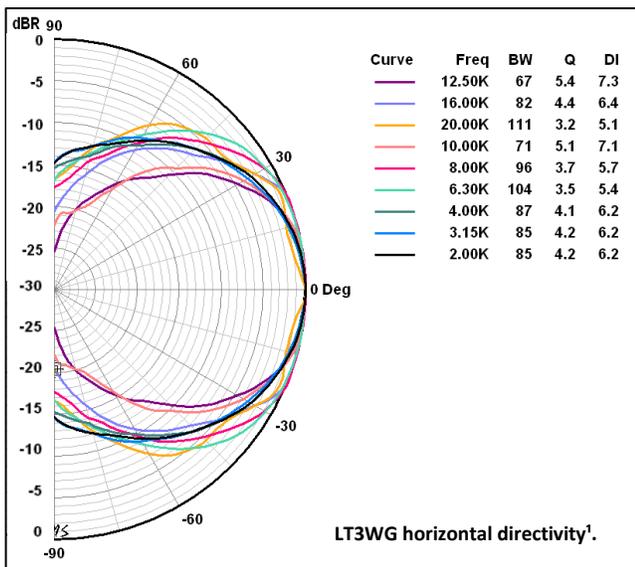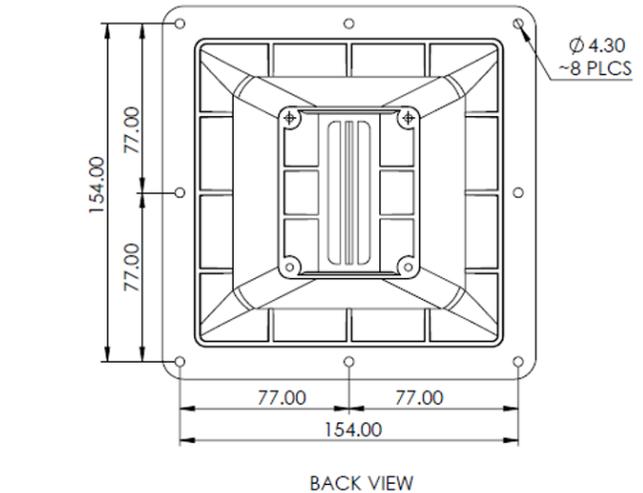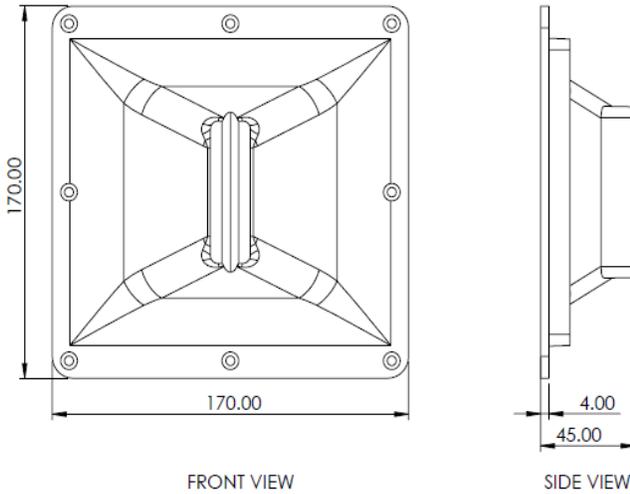

1. Measured and defined for Radian LT3 planar ribbon driver. Horizontal coverage angle defined at -6dB, averaged in 1/3 octave bands within 2 kHz-20 kHz range. Vertical coverage angle defined at -6dB, averaged within 2-10 kHz range.