

MID-BASS

MB8N251

Professional Low Frequency Transducer

PART NUMBER **11100061**

The MB8N251 is a 8" neodymium mid-bass driver with an excellent linearity, good efficiency and high power handling capabilities. The 2,5" aluminium voice coil combined with a high strength fibreglass former allows high efficiency and good frequency response extension.

Aluminium basket and magnetic assembly design provide an excellent heat dissipation and very low power compression.

The M-roll surround shape combined to spider design offer good linear displacement and precise low frequency reproduction. The waterproof body cone treatment ensures a durable performance in every application.

- 2.5-inch , fibreglass former, aluminum voice coil
- 600 Watt continuous program power handling
- 96 dB Sensitivity
- 60 Hz - 3.5kHz Frequency range
- Forced air ventilation
- M-roll surround and exponential cone geometry


APPLICATIONS


The MB8N251 finds its application in compact 2-way bass reflex system where very high dynamic and power handling are required.

Perfect for multi-way reflex enclosures such as line arrays.




60 3500

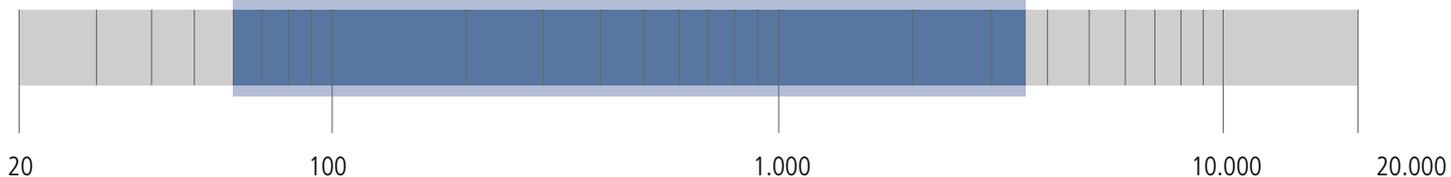

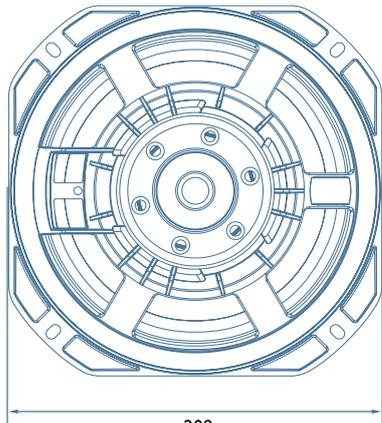

ø 208 mm

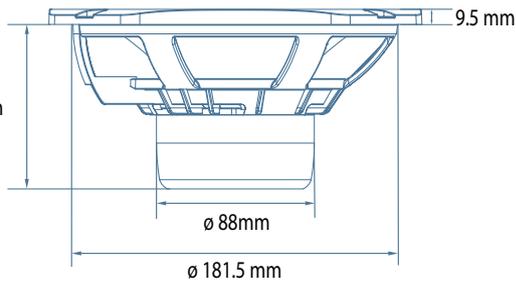


92.5 mm


9.5 mm

ø 88 mm

ø 181.5 mm

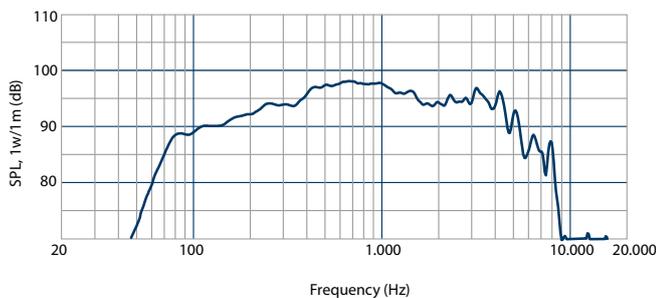

Frequency response curve of the loudspeaker made in a hemispherical, free field and mounted in a reflex box with an internal volume of 55 litres and tuned at 60Hz, applying a sinusoidal signal of 2.83 V @ 8 at 1m.

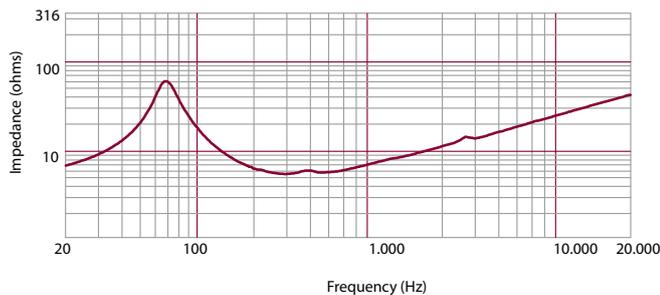

Impedance magnitude curve measured in free air

GENERAL SPECIFICATIONS

Nominal Diameter	200/8	mm/inch
Rated Impedance	8	ohm
Program Power ¹	600	Watts
Power handling capacity ²	300	Watts
Sensitivity ³	96	dB
Frequency Range	60 - 3500	Hz
Effective Piston Diameter	165/6.5	mm/inch
Max Excursion Before Damage (peak to peak)	40/1.57	mm/inch
Minimum Impedance	6.0	ohm
Voice Coil Diameter	64/2.50	mm/inch
Voice Coil Material	Aluminum	
Voice Coil Winding Depth	14/0.55	mm/inch
Number of layers	1	
Kind of layer	outside	
Top Plate Thickness	9/0.35	mm/inch
Cone Material	No pressed pulp	
Cone Design	Curved	
Surround Material	Polycotton	
Surround Design	M-roll	

THIELE - SMALL PARAMETERS ⁴

Resonance frequency	Fs	68	Hz
DC resistance	Re	5.1	ohm
Mechanical factor	Qms	4.6	
Electrical factor	Qes	0.26	
Total factor	Qts	0.25	
BL Factor	BL	15.2	T · m
Effective Moving Mass	Mms	27.2	gr
Equivalent Cas air load	Vas	12.8	liters
Effective piston area	Sd	0.021	m ²
Max. linear excursion (mathematical) ⁵	Xmax	4.8	mm
Voice - coil inductance @ 1KHz	Le1K	1.3	mH
Half-space efficiency	Eff	1.70	%

MOUNTING INFORMATION

Overall Diameter	239/9.41	mm/inch
Bolt Circle Diameter	221-227/8.70-8.93	mm/inch
Bolt Hole Diameter	6.5/0.26	mm/inch
Front Mount Baffle Cut-out	185/7.28	mm/inch
Rear Mount Baffle Cut-out	185/7.28	mm/inch
Depth	92.5/3.64	mm/inch
Volume occupied by the driver ⁶	0.6/0.02	liters/ft3

SHIPPING INFORMATION

Net Weight	2.0/4.41	Kg/Lbs
Shipping Weight	2.2/4.85	Kg/Lbs

NOTES TO SPECIFICATIONS

1 Program Power is defined as 3 dB greater than AES power. - 2 AES standard. - 3 Sensitivity measurement is based on a 500-2,5 kHz pink noise signal with input power of 2.83V @ 8 Ohms. - 4 Thiele-Small parameters are measured after a 2 hour warm up period running the loudspeaker at full power handling capacity. - 5 The maximum linear excursion is calculated as: $(Hvc \cdot Hg)/2 + Hg/4$ where Hvc is the voice coil depth and Hg the gap depth. - 6 Calculated for front mounting on 18 mm thick board.
The data are not binding; RCF reserves the right to modify the data at any time and without previous notice.