


FEATURES

- Precision diaphragm assembly
- Unique foil damping
- Optimized rear chamber
- Two part faceplate
- Smooth controlled dispersion
- Very flat impedance curve

Specs :

Nominal Impedance	4 Ω
DC resistance, Re	3.9 Ω
Effective piston area, Sd	12.6 cm ²
Free air resonance, Fs	2200 Hz
Sensitivity (2.83 V / 1 m)	91 dB
Frequency range	2200-40000 Hz
Net weight	332 g

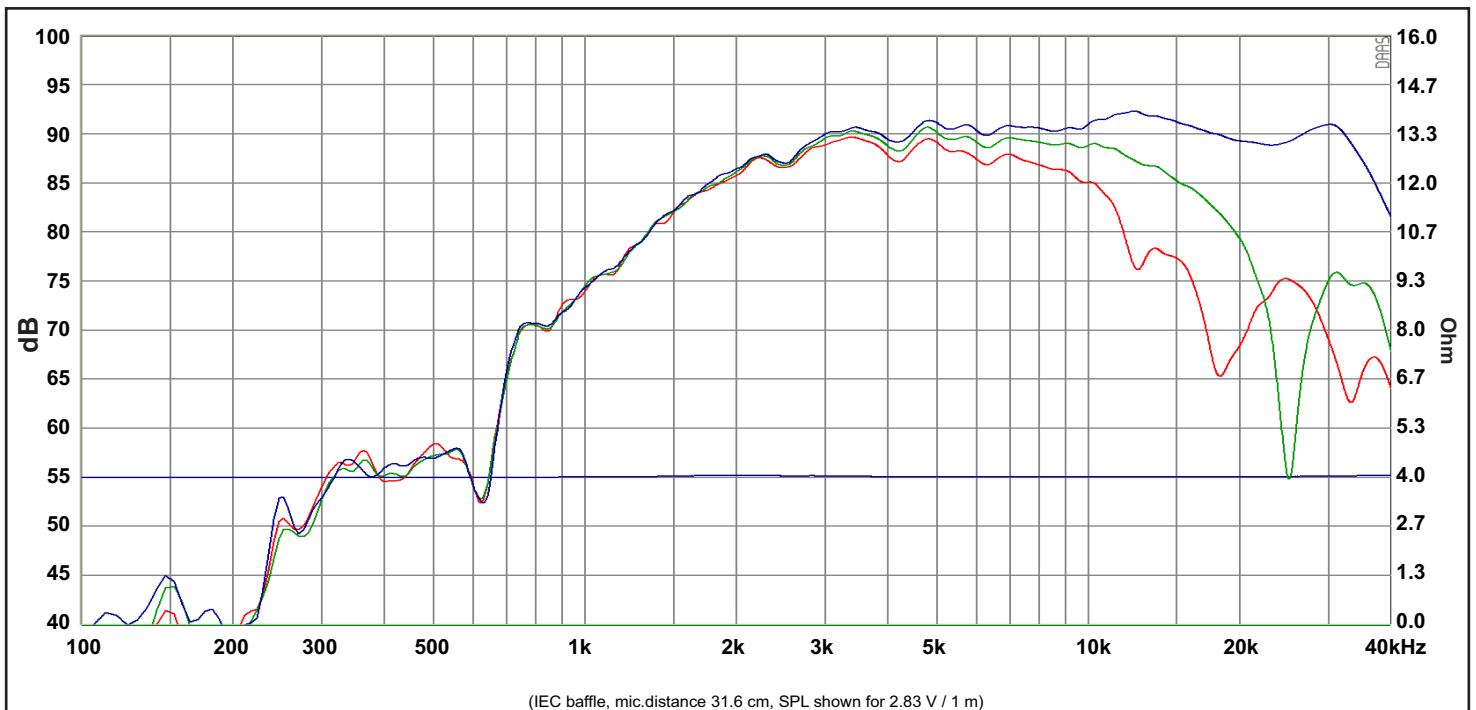

Response Curve :

— (Blue) : on axis

— (Green) : 30° off-axis

— (Red) : 60° off-axis