


### Specs :

#### FEATURES

- Shallow light weight design
- Hard pressed vented paper cone (made in-house)
- Inverted low damping rubber surround
- Symmetric suspension
- Stacked neodymium motor with built-in soft limiting
- Non-conducting fiber glass coil former
- Long life lead wires

Nominal Impedance	4 Ω	Free air resonance, Fs	28 Hz
DC resistance, Re	3.5 Ω	Sensitivity (2.83 V / 1 m)	92 dB
Voice coil inductance, Le	1.27 mH	Mechanical Q-factor, Qms	5.04
Effective piston area, Sd	340 cm <sup>2</sup>	Electrical Q-factor, Qes	0.33
Voice coil diameter	38.5 mm	Total Q-factor, Qts	0.31
Voice coil height	16 mm	Moving mass incl.air, Mms	63 g
Air gap height	9 mm	Force factor, Bl	10.8 Tm
Linear coil travel (p-p)	7 mm	Equivalent volume, Vas	84 liters
Magnetic flux density	0.72 T	Compliance, Cms	0.51 mm/N
Magnet weight	0.1 kg	Mechanical loss, Rms	2.2 kg/s
Net weight	0.94 kg	Rated power handling*	80 W

\* IEC 268-5, T/S parameters measured on drive units that are broken in.

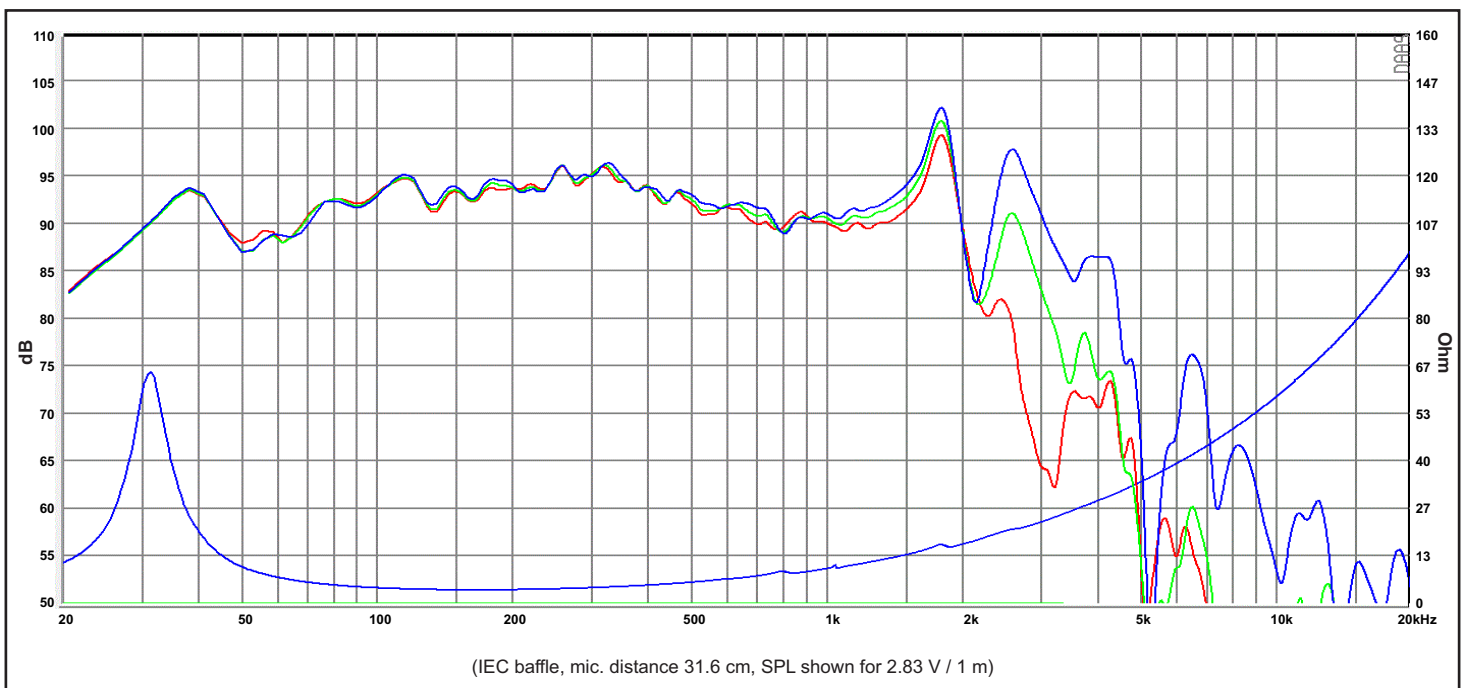

Response Curve :

— (Blue) : on axis

— (Green) : 30° off-axis

— (Red) : 60° off-axis