


- 3" sandwich voice coil fiberglass former
- Progressive wave Konex spider
- Cloth surround with DAR technology
- Cone waterproof treatment
- Ventilated voice coil to reduce power compression
- BMF ferrite magnet
- 94.0 dB sensitivity




Specifications	
Nominal Diameter	269mm (10")
Nominal Impedance	16Ω
Rated Power AES ⁽¹⁾	350W
Continuous Program Power ⁽²⁾	700W
Sensitivity @ 1W/1m ⁽³⁾	94.0dB
Voice Coil Diameter	75mm (3")
Voice Coil Winding Depth	18mm
Magnetic Gap Depth	10mm
Flux Density	1.08T
Magnet Weight	1790g
Net Weight	6.6kg

Thiele & Small Parameters ⁽⁴⁾			
Re	12.82Ω	Fs	52.2Hz
Qms	8.76	Qes	0.42
Qts	0.40	Mms	42.3g
Cms	220μm/N	Bxl	20.65Tm
Vas	37.4l	Sd	346.4cm ²
X max ⁽⁵⁾	+/-4.2mm	X var ⁽⁶⁾	+/-7.1mm
η ₀	1.23%	Le (1kHz)	1.24mH

Constructive Characteristics	
Magnet	: Ferrite
Basket Material	: Aluminium Die-Cast
Voice Coil Winding Material	: Aluminium
Voice Coil Former Material	: Fiberglass
Cone Material	: Paper
Cone Treatment	: Surface Waterproof Treatment
Surround Material	: Treated Cloth
Dust Dome Material	: Solid Paper

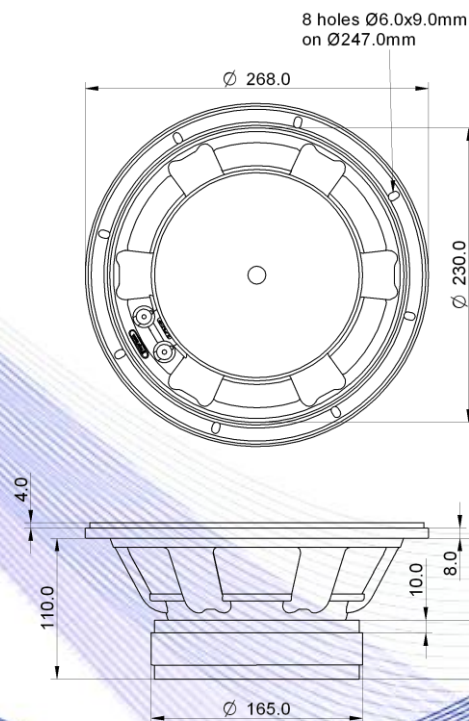

Frequency Response on IEC Baffle (DIN 45575) @ 1W,1m – Free Air Impedance

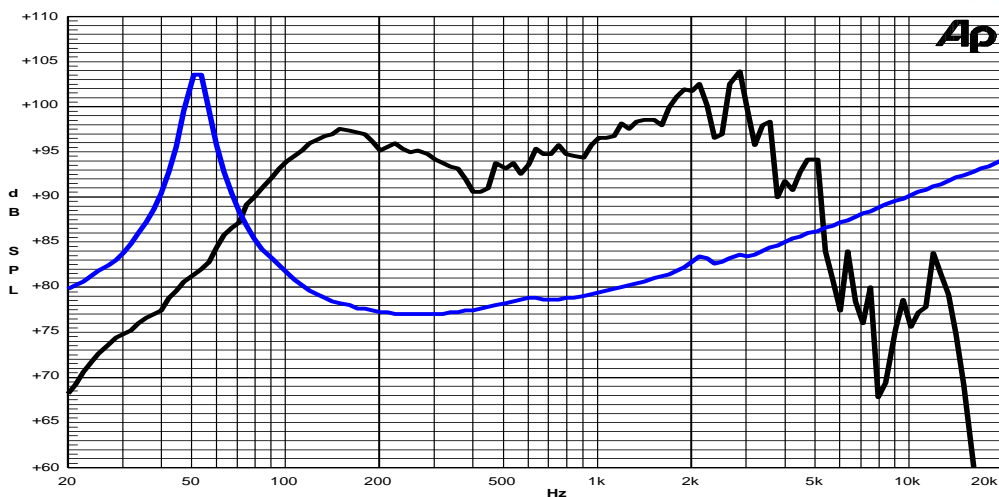

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
 - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
 - 3: Calculated by Thiele & Small parameters
 - 4: Thiele & Small parameters measured with laser system without preconditioning test
 - 5: Measured with respect to a THD of 10% using a parameter-based method
 - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
 - 7: Drawing dimensions: mm
 - 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle