

Code Z006013


## **10 SR 2,5 CP 8**Ω


## 10″ | 600 W

## Subwoofer

- 2,5" voice coil Fiberglass former
- RHE High Excursion Rubber surround
- WpT Waterproof Cone Treatment
- HeF High Excursion Ferrite Magnet Circuit
- VMVc Ventilated Magnet and Voice Coil to reduce Power Compression
  - 93.0 dB sensitivity
  - Frequency Range 35-2000 Hz








General Speci	fications		
Nominal Diameter			269 mm (10")
Nominal Impedar	псе		8 Ω
Rated Power AES	S <sup>(1)</sup>		300 W
Continuous Program Power <sup>(2)</sup>			600 W
Sensitivity @ 1W/1m <sup>(3)</sup>			93.0 dB
Voice Coil Diameter			65 mm (2,5")
Voice Coil Winding Depth			18 mm
Magnetic Gap De	epth		8 mm
Flux Density			1.05 T
Magnet Weight			1430 g
Net Weight			5.0 kg
Thiele & Smal	Parameters (4)		
Re	5.2 Ω	Fs	34.5 Hz
Qms	6.35	Qes	0.34
Qts	0.32	Mms	56.5 g
Cms	377 μm/N	Bxl	13.7 Tm
Vas	66.7 I	Sd	353.0 cm <sup>2</sup>
X max <sup>(5)</sup>	+/-6.0 mm	X var <sup>(6)</sup>	+/-10.0 mm
η₀	0.78 %	Le (1kHz)	1.16 mH
.10	0110 /0	20 (11112)	



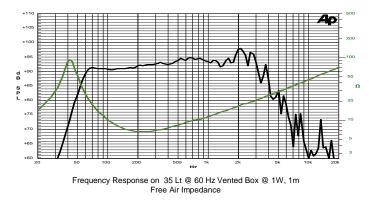

Constructive Characteristics		
Magnet	Ferrite	
Basket Material	Aluminium Die-Cast	
Voice Coil Winding Material	Copper	
Voice Coil Former Material	Fiberglass	
Cone Material	Paper	
Cone Treatment	Surface Waterproof Treatment	
Surround Material	Rubber	
Dust Dome Material	Solid Paper	
Mounting Information		
Overall Diameter	270 mm	
Baffle Cutout Diameter	232 mm	
Mounting Holes	8 holes ø6 on ø252 mm	
Total Depth	122 mm	

(1) Rated Power measured with 2-hour test with pink noise signal, 6dB crest factor, loudspeaker in free air, power calculated on rated Zmin. (2) Power on Continuous Program is defined as 3dB greater than the Rated Power. (3) Calculated by Thiele & Small parameters, for SPL average in box refer to frequency response. (4) Thiele & Small parameters measured with laser system after preconditioning test. (5) Measured with respect to a THD of 10%. (6) Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value. (7) Drawing dimensions: mm.