# **Driver Specification Sheet**



Model No:: OT19NC00-04 Rev: 1


Product Line: Tymphany Last Update: 2017-04-25 14:32:09


#### **Product Description**

This member of the OT tweeter family utilizes two Tymphany technologies to deliver exceptional sound quality: the ring radiator patent, and the central waveguide patent. This model features a 19mm 4 ohm voice coil, mounted in a neodymium magnet motor. The tweeter also features a rear chamber to create extended low frequency response. This compact tweeter without faceplate is ready for installation into compact systems.



## **Mechanical Drawing**






## **Specifications**

| DC Resistance                 | Revc        | Ohms   | 3.17    | 5.0%      | Energy Bandwidth Product   | EBP            | (1/Qes)*fs   |       |
|-------------------------------|-------------|--------|---------|-----------|----------------------------|----------------|--------------|-------|
| Minimum Impedance             | Zmin        | Ohms   | 3.64    | 7.5%      | Moving Mass                | Mms            | g            | 0.2   |
| Voice Coil Inductance         | Le          | mH     | 0.01    |           | Suspension Compliance      | Cms            | um/N         | 116.3 |
| Resonant Frequency            | Fs          | Hz     | 1029.44 | 15%       | Effective Cone diameter    | D              | cm           | 2.4   |
| Mechanical Q Factor           | Qms         |        | 7.03    |           | Effective Piston Area      | Sd             | cm^2         | 4.5   |
| Electrical Q Factor           | Qes         | 1.56   |         |           | Effective Volume           | Vas            | L            | 0     |
| Total Q Factor                | Qts         |        | 1.27    |           | Motor Force Factor         | BL             | Tm           | 1.64  |
| Ratio Fs/Qts                  | F           | Fs/Qts | 808.03  |           | Motor Efficiency Factor    | ß              | (T*M^2)/Ohms | 0.9   |
| Half Space Sensitivity @2.83V | db@2.83V/1M | dB     | 88.82   | +/- 1.0db | Voice coil former Material | VCfm           |              | ASV   |
| Half Space Sensitivity @1W/1M | db@1W/1M    | dB     | 85.4    | +/- 1.0db | Voice coil inner diameter  | VCd            | mm           | 19.3  |
| Gap Height                    | Gh          | mm     | 2       |           | Rated Noise Power          | Р              | W            | 80    |
| Maximum Linear Excursion      | Xmax        | mm     | 0.1     |           | Test Spectrum Bandwidth    | 2.5kHz - 20kHz |              |       |
| Ferrofluid Type               | FF          |        |         |           | Driver Size                | Inch           | 19 mm        |       |
| Driver Mass                   | Kg          | 0.04   |         |           |                            |                |              |       |

### Frequency and Impedance Response

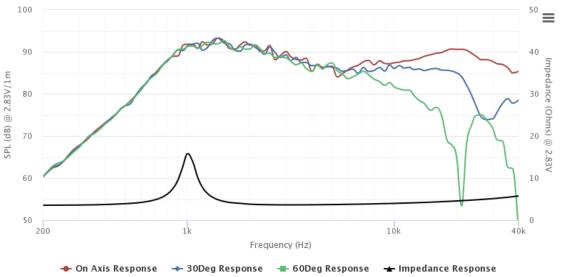

Highcharts.com